



Window Frame Anchors

Data Sheet

Window Frame Anchor

A flat headed sleeve with retaining lugs manufactured from PA6 nylon and fitted with a Zinc Plated screw. The rigid sleeve with expander cone prevents distortion of the uPVC window frames Suitable for use in Concrete, Brick, Concrete Blocks, & Natural Stone.




Plug Diameter	mm	8			10				
Plug Length Z. P. Screw	mm	80	100	120	80	100	120	140	160
Max. Fixture Thickness	mm	40	60	80	35	55	70	90	115
Drill Hole Diam	mm	8			10				
Min. Hole Depth	mm	45			50				
Rec. Tensile Loads									
30N/mm ² Concrete	kN	0.8			1.3				
20N/mm ² Solid Brickwork	kN	0.6			0.8				
7N/mm ² Concrete Block	kN	0.4			0.5				

Due to the variable nature of Bricks and Blockwork these figures are for guidance only.

Window Frame Anchors are suitable for use in most solid base materials ranging from reinforced concrete, concrete blocks, brickwork and natural stone.

Typical Applications:
uPVC Windows and Doors

Installation Instructions

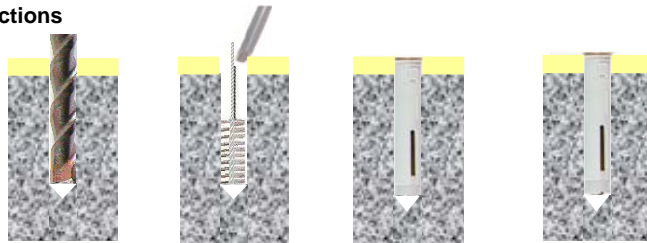

1. Drill correct diameter hole through fixture to correct depth in base material.
2. Clean hole by brushing and blowing
3. Insert Window Frame Anchor through fixture into base material and tighten screw.

Dartford	01322 277733	Stone	01785 819819
Elland	01422 370121	Swindon	01793 527829
Milton Keynes	01908 330050		

