



Rockite and **Rockite X** are expanding, fast setting, hydraulic type cement products. When mixed with water they provide a compound which can be used for grouting, anchoring or patching.

Rockite X is suitable for external use and requires no further treatment.

Product Range

ROCKITE (Dry/Internal Use)

Product Code	Pack Size
57 9002	1 x 2.27kg (5lb) Carton
57 9003	1 x 4.54kg (10lb) Pail
	1 x 11.35kg (25lb) Carton
57 9004	1 x 22.7kg (50lb) Carton
57 9005	1 x 22.7kg (50lb) Pail
57 9020	1 x 0.45kg (1lb) Cartons

ROCKITE X (External Use)

Product Code
57 9011
57 9012

Installation Data

		M10	M12	M16	M20	M24	M30
Thread Diam	mm	10	12	16	20	24	30
Drill Hole Diam	mm	25	32	45	50	62	75
Min. Hole Depth	mm	75	100	125	150	200	300
Minimum Embedment Depth	mm	75	100	125	150	200	300
Recommended Tightening Torque	Nm	22	39	96	188	325	645
Recommended Tensile Load	kN	9.3	13.5	25.1	39.2	56.4	89.6
Minimum Spacing	mm	225	300	375	450	600	900
Minimum Edge Distance	mm	150	200	250	300	400	600

Loads are for C20/25 concrete using a grade 4.6 bolt

Compressive Strength (N/mm²)

	1 Hour	24 Hours	7 Days
ROCKITE and ROCKITE X	32	34	55
Cure Times	Rockite and Rockite X set in 20 to 30 minutes and can be loaded after 1 hour		

Rockite is a cement base product which just requires the addition of water to form a versatile compound suitable for patching concrete, leveling base plates and grouting in bolts and posts. Its non shrink properties provide a crack free finish and secure anchorage. **Rockite** can be used indoors without the need for any further treatment and is resistant to oil and grease. **For external use Rockite should be allowed to dry for 7 days then treated with a good quality exterior grade paint. It should not be used in brick or other porous base materials where they may absorb water.**

Rockite X can be used indoors or outdoors and requires no further treatment or protection.

Typical Applications:

Holding Down Bolts for Machinery, Racking, and Safety Fences. Grouting in Fence Posts, Lighting Columns, Barriers. Forming Machinery Base plates. Repairing Cracks. Patching Walls and Floors

Data Sheet


Rockite & RockiteX

Base Material :- Concrete, Brick, Blockwork, Natural Stone

CAUTION :-

Rockite & Rockite X have very strong expansion properties which generate the high tensile loads that can be achieved and as such their use in Hollow Bricks and Blocks is not recommended.

Installation Instructions

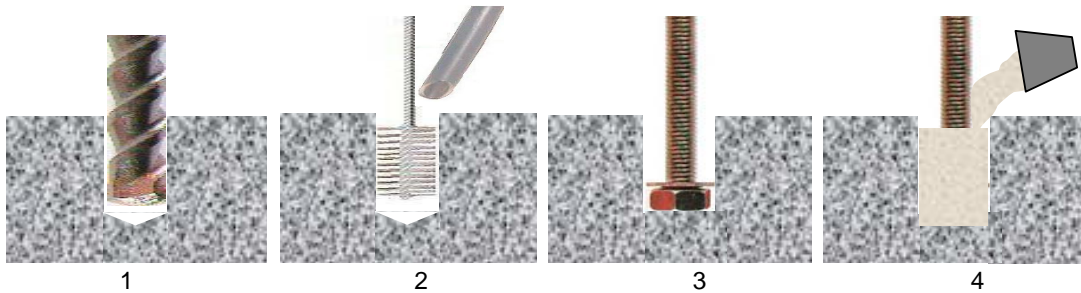

- 1 Drill correct diameter hole to minimum recommended depth through fixture
- 2 Clean hole by brushing and blowing to remove drilling debris and dust. Dampen sides.
- 3 Insert bolt and washer into hole ensuring washer is free to fit against head of bolt.
- 4 Mix sufficient material to a pourable consistency and fill hole around bolt, allow to cure, position fixture, attach and tighten nut.

Repairing and Patching

- 1 Clean out the area to be repaired removing all loose material and dust. Edges should be at least 12mm thick. Do not leave feather edges.
- 2 Dampen area but do not allow accumulation of water.
- 3 Mix up a small quantity of Rockite and scrub into surfaces to ensure bond.
- 4 Mix Rockite to pourable consistency for floors & plastic consistency for walls. Apply to area to be repaired.
- 5 After approx 10 minutes smooth with trowel & after 30 minutes sprinkle with water.
- 6 After 1 hour normal floor traffic may be resumed.

For external use Rockite should be allowed to dry for 7 days then treated with a good quality exterior paint. It should not be used externally in brick or other porous base materials where they may absorb water. Rockite X used externally needs no further treatment.

Quantity Guide

Bolt/Post Diam mm	Hole Diam mm	Embedment Depth mm							
		Rockite Weight in kg.							
		50	75	100	125	150	200	250	300
10	25	0.03	0.04	0.06	0.07	0.09	0.11	0.14	0.17
12	32	0.05	0.07	0.10	0.13	0.17	0.20	0.26	0.30
16	45	0.11	0.16	0.23	0.27	0.31	0.45	0.57	0.63
20	50	0.14	0.20	0.27	0.33	0.40	0.57	0.68	0.79
24	62	0.20	0.28	0.40	0.50	0.59	0.79	1.00	1.18
32	75	0.28	0.43	0.57	0.86	1.09	1.41	1.41	1.72
37	75	0.26	0.37	0.50	0.77	1.02	1.27	1.27	1.54
50	75	0.18	0.28	0.37	0.48	0.73	0.91	0.91	1.13
62	107	0.37	0.57	0.77	1.13	1.50	1.93	1.93	2.27
75	107	0.28	0.40	0.59	0.79	1.09	1.36	1.36	1.68