



ETA-Danmark A/S  
Göteborg Plads 1  
DK-2150 Nordhavn  
Tel. +45 72 24 59 00  
Internet [www.etadanmark.dk](http://www.etadanmark.dk)

Authorised and notified according  
to Article 29 of the Regulation (EU)  
No 305/2011 of the European  
Parliament and of the Council of 9  
March 2011

MEMBER OF EOTA



## European Technical Assessment ETA-25/1028 of 2025/10/24

### I General Part

**Technical Assessment Body issuing the ETA and designated according to Article 29 of the Regulation (EU) No 305/2011: ETA-Danmark A/S**

**Trade name of the construction product:**

JCP J-Fix Polyester Styrene Free

**Product family to which the above construction product belongs:**

Bonded anchor with anchor rod made of galvanized steel or stainless steel for use in masonry

Threaded rod sizes: M8 to M16

Rebar sizes: Ø8 to Ø12

**Manufacturer:**

Hexstone Ltd. JCP Construction Products  
Opal Way Stone Business Park  
Stone, Staffordshire ST15 OSW - UK  
Tel. +44 (0)1785 811300  
Fax +44 (0)1785 817199  
Internet: [www.owlett-jaton.com/hexstone-ltd](http://www.owlett-jaton.com/hexstone-ltd)

**Manufacturing plant:**

JCP – Manufacturing 1

**This European Technical Assessment contains:**

39 pages including 34 annexes which form an integral part of the document

**This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of:**

EAD 330076-01-0604 - Metal injection anchors for use in masonry

**This version replaces:**

Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full (except the confidential Annexes referred to above). However, partial reproduction may be made, with the written consent of the issuing Technical Assessment Body. Any partial reproduction has to be identified as such.

## II SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT

### 1 Technical description of product

The Injection system JCP J-Fix Polyester Styrene Free is a bonded anchor (injection type) consisting of a mortar cartridge with JCP injection mortar J-Fix Polyester Styrene Free, a perforated sleeve GC, and an anchor rod with hexagon nut and washer in the range of M8 to M16 and rebar from Ø8 to Ø12.

The steel elements are made of zinc coated steel or stainless steel.

The anchor rod/rebar is placed into a drilled hole filled with injection mortar and is anchored via the bond between steel element, injection mortar and masonry.

An illustration of the product and intended use is given in Annex A1 and Annex A2.

The characteristic material values, dimensions and tolerances of the anchors not indicated in Annexes shall correspond to the respective values laid down in the technical documentation<sup>1</sup> of this European Technical Assessment.

The intended use specifications of the product are detailed in the Annex B1 to B13.

### 2 Specification of the intended use(s) in accordance with the applicable European Assessment Document (hereinafter EAD)

The anchors are intended to be used for anchorages for which requirements for mechanical resistance and stability and safety in use in the sense of the Basic Works Requirements 1 of Regulation (EU) 305/2011 shall be fulfilled and failure of anchorages made with these products would compromise the stability of the works, cause risk to human life and/or lead to considerable economic consequences.

The anchor is to be used only for anchorages subject to static or quasi-static loading in solid masonry (use category b) or hollow or perforated masonry (use category c) or AAC masonry category d according to Annex B2 to B5. The mortar strength class of the

masonry has to be M 2,5 according to EN 998-2:2010 at minimum.

The anchors may be installed in Category w/d: installation in dry or wet base material and use in structures subjected to dry, internal conditions and Category w/w: installation in dry or wet base material and use in structures subjected to dry or wet environmental conditions.

The anchors may be used in the following temperature range:

Service temperature 1: 40°C max short term temperature 24°C max long term temperature

Service temperature 2: 50°C max short term temperature 40°C max long term temperature

Elements made of galvanized steel or stainless steel may be used in structures subject to dry internal conditions only.

The provisions made in this European Technical Assessment are based on an assumed intended working life of the anchor of 50 years.

The indications given on the working life cannot be interpreted as a guarantee given by the producer or Assessment Body, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

---

<sup>1</sup> The technical documentation of this European Technical Assessment is deposited at ETA-Danmark and, as far as relevant for the tasks of the Notified bodies involved in the attestation of conformity procedure, is handed over to the notified bodies.

### **3 Performance of the product and references to the methods used for its assessment**

#### **3.1 Characteristics of product**

##### **Mechanical resistance and stability (BWR 1):**

The essential characteristics are detailed in the Annex from C1 to C15.

##### **Safety in case of fire (BWR 2):**

No performance assessed.

##### **Hygiene, health and the environment (BWR3):**

No performance assessed.

#### **3.2 Methods of assessment**

The assessment of fitness of the anchor for the intended use in relation to the requirements for mechanical resistance and stability in the sense of the Basic Requirements 1 has been made in accordance with EAD 330076-01-0604, based on the Use Categories b, c and d in respect of the base material and Category w/d and w/w in respect of installation and use.

#### **4 Assessment and verification of constancy of performance (hereinafter AVCP) system applied, with reference to its legal base.**

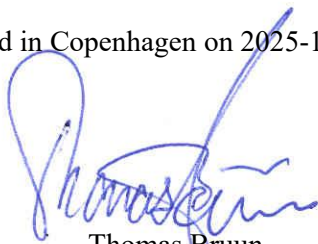
##### **4.1 AVCP system**

According to the decision 1997/177/EC of the European Commission, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011) is 1.

#### **5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD**


Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at ETA-Danmark prior to CE marking

Issued in Copenhagen on 2025-10-24 by




Thomas Bruun  
Manager, ETA-Danmark

**Anchor application in solid masonry and in AAC masonry with threaded rod from M8 to M16**

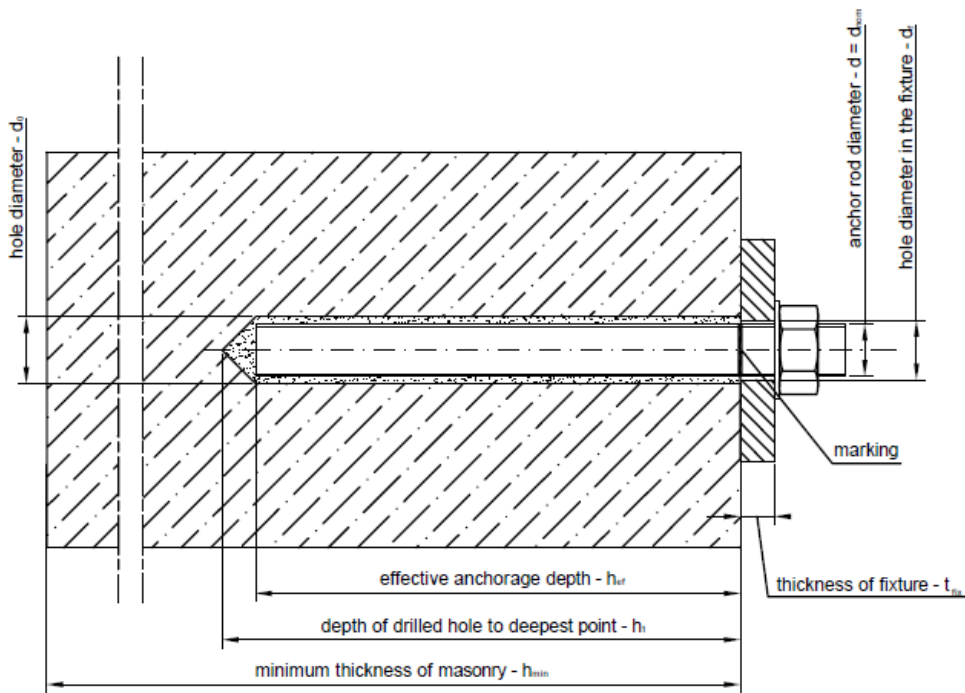

**Anchor application in solid masonry with rebar from  $\varnothing 8$  to  $\varnothing 12$**

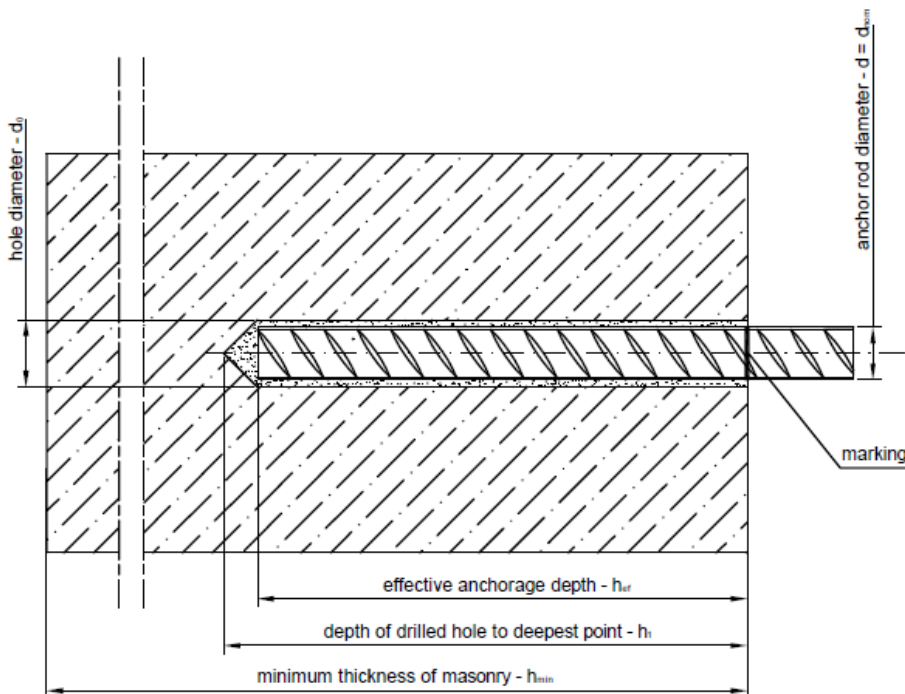


**JCP J-FIX POLYESTER STYRENE FREE**

**Product description**  
Installed condition (1)

**Annex A1**  
of European  
Technical Assessment  
ETA-25/XXXX

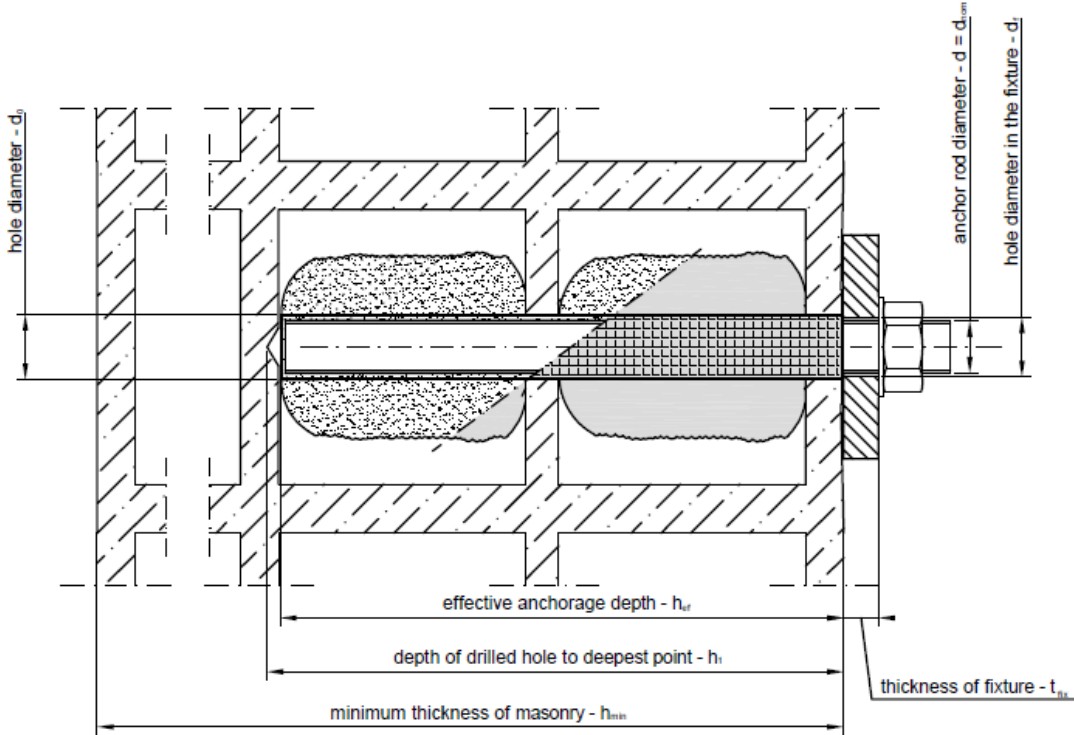**Anchor application in hollow masonry with threaded rod from M8 to M12 and GC plastic sleeves**




**JCP J-FIX POLYESTER STYRENE FREE**


**Product description**  
Installed condition (2)

**Annex A2**  
of European  
Technical Assessment  
ETA-25/XXXX

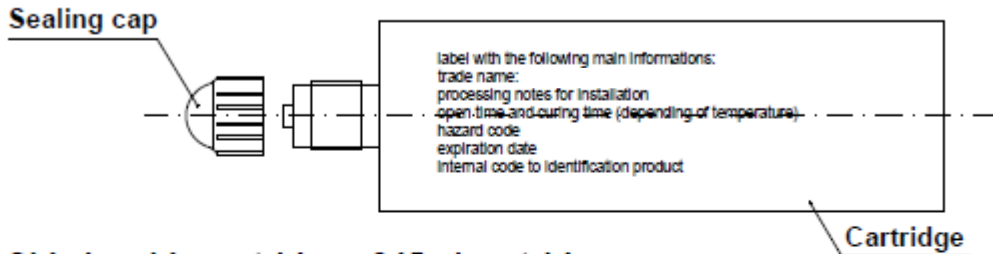
**Coaxial cartridge - sizes from 75 ml to 420 ml**




**Side by side cartridge - 345ml cartridge**

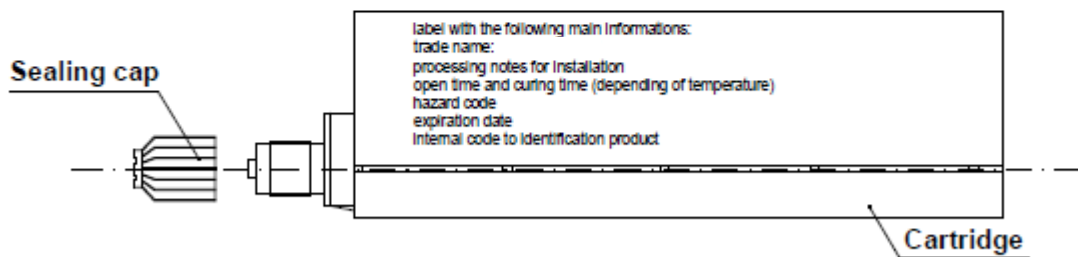


**CIC foil cartridge - sizes from 165 ml to 300 ml**

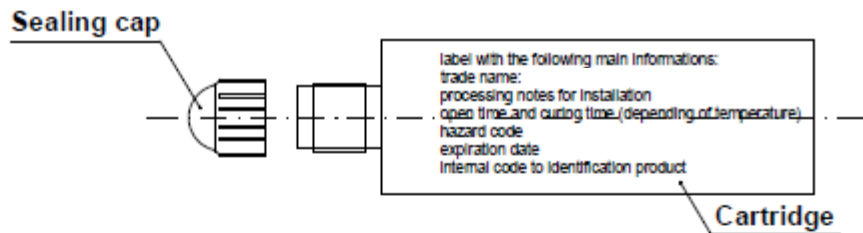

**Coaxial peeler cartridge - size of 280 ml**

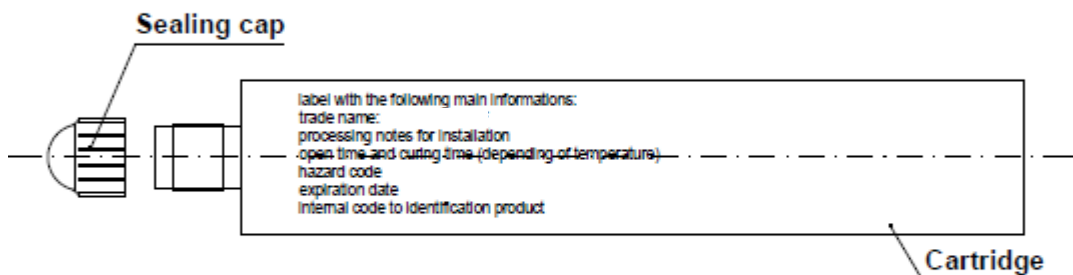

**MIXER - the mixer is suitable for each type of cartridge**

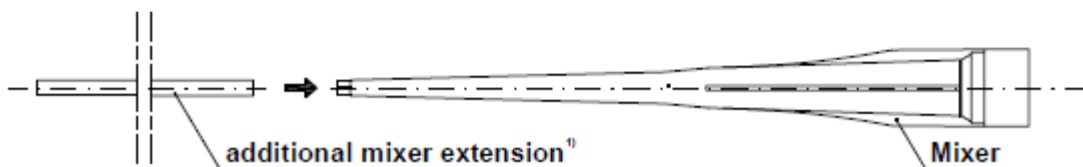


1) Variable length from 380 mm up to 1000 mm

**JCP J-FIX POLYESTER STYRENE FREE**

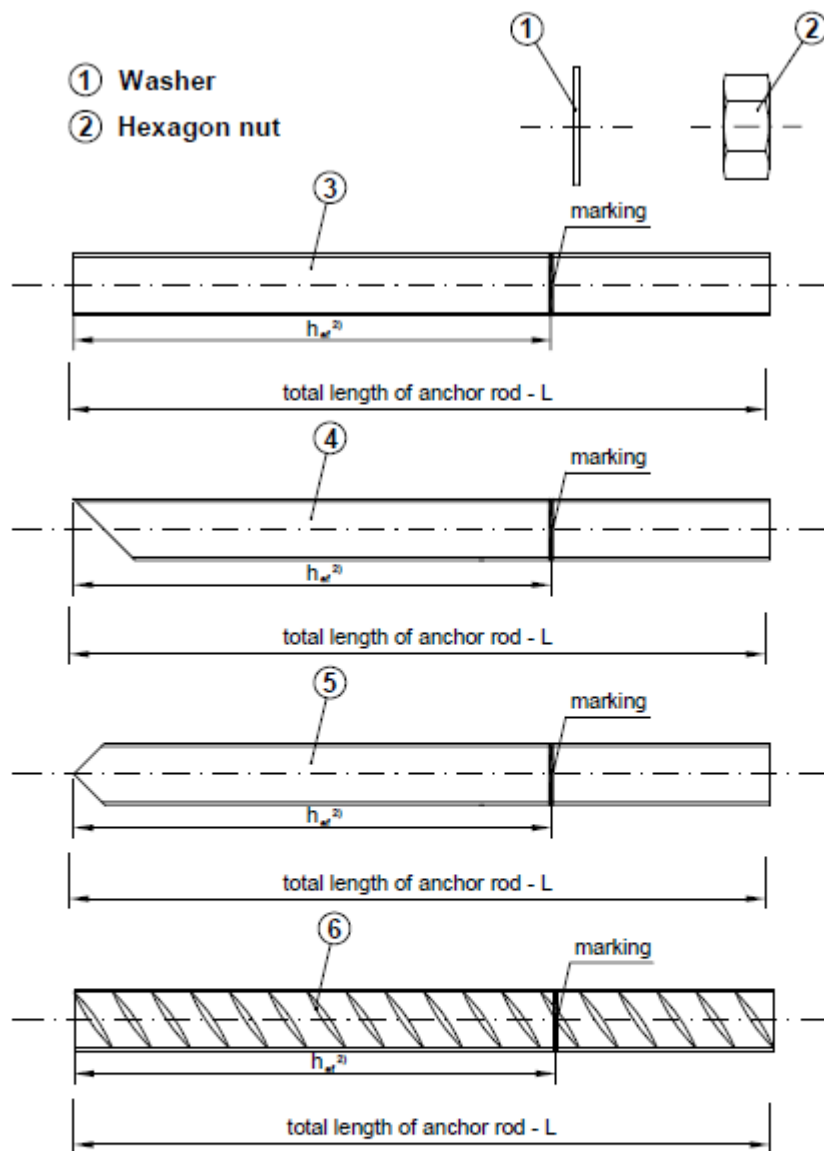**Product description**  
 Cartridge types and sizes

**Annex A3**  
 of European  
 Technical Assessment  
 ETA-25/XXXX



- ③ Version 1 - rod with flat end with marking on  $h_w$
- ④ Version 2 - rod with 45° cutted end with marking on  $h_w$
- ⑤ Version 3 - rod with V shape end with marking on  $h_w$
- ⑥ Rebar - Deformed reinforcing bar with marking on  $h_w$

**JCP J-FIX POLYESTER STYRENE FREE**

**Product description**  
Steel elements

**Annex A4**  
of European  
Technical Assessment  
ETA-25/XXXX

**Table A1: Threaded rod materials**

Designation	Material				
Steel, zinc plated electroplated $\geq 5 \mu\text{m}$ acc. to EN ISO 4042 hot-dip galvanized $\geq 40 \mu\text{m}$ acc. to EN ISO 1461					
Threaded rod	Property class	Characteristic steel ultimate strength	Characteristic steel yield strength	Fracture elongation	EN ISO 898-1
	4.8	$f_{uk} \geq 400 \text{ N/mm}^2$	$f_{yk} \geq 320 \text{ N/mm}^2$	$A_5 > 8\%$	
	5.8	$f_{uk} \geq 500 \text{ N/mm}^2$	$f_{yk} \geq 400 \text{ N/mm}^2$	$A_5 > 8\%$	
	8.8	$f_{uk} \geq 800 \text{ N/mm}^2$	$f_{yk} \geq 640 \text{ N/mm}^2$	$A_5 \geq 12\%$	
Hexagon nut	4	for class 4.8 rods			EN 898-2
	5	for class 5.8 rods			
	8	for class 8.8 rods			
Washer	Steel, according to EN ISO 7089; corresponding to anchor rod material				
Stainless steel A2 (Materials) 1.4301, 1.4307, 1.4567, 1.4541					
Stainless steel A4 (Materials) 1.4401, 1.4404, 1.4571, 1.4362, 1.4578					
High corrosion resistance stainless steel (HCR) (Materials) 1.4529, 1.4565					
Threaded rod	Property class	Characteristic steel ultimate strength	Characteristic steel yield strength	Fracture elongation	EN 10088 EN ISO 3506
	50	$f_{uk} \geq 500 \text{ N/mm}^2$	$f_{yk} \geq 210 \text{ N/mm}^2$	$A_5 > 8\%$	
	70	$f_{uk} \geq 700 \text{ N/mm}^2$	$f_{yk} \geq 450 \text{ N/mm}^2$	$A_5 \geq 12\%$	
	80	$f_{uk} \geq 800 \text{ N/mm}^2$	$f_{yk} \geq 600 \text{ N/mm}^2$	$A_5 \geq 12\%$	
Hexagon nut	50	for class 50 rods			EN 10088 EN ISO 3506
	70	for class 70 rods			
	80	for class 80 rods			
Washer	Steel, according to EN 10088; corresponding to anchor rod material				

Commercial standard threaded rods may be used, with: material and mechanical properties according to Table A1, confirmation of material and mechanical properties by inspection certificate 3.1 according to EN-10204:2004, marking of the threaded rod with the embedment depth, see Annex A4.

**Table A2: Rebar materials**


Designation	Material
Rebar according to EN 1992-1-1:2004+AC:2010, Annex C	Bars and de-coiled rods Class B or C With $f_{yk}$ and $k$ according to NDP or NCL or EN 1992-1-1:2004/NA $f_{uk} = f_{tk} = k \times f_{yk}$ - Rib height of the bar (h) in the range $0,05d \leq h \leq 0,07d$

**Table A3: Injection mortar**


Product	Composition
JCP J-Fix Polyester Styrene Free two components injection mortar	Mortar resin styrene-free, hardener, filler

<b>JCP J-FIX POLYESTER STYRENE FREE</b>	<b>Annex A5</b> of European Technical Assessment ETA-25/XXXX
<b>Product description</b> Materials – Steel elements and injection mortar	

**Plastic sleeve for hollow/perforated masonry: nominal dimensions and material**





top view

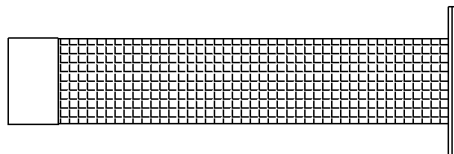


**Plastic sleeve GC 20x85 for M12**  
 Nominal diameter 20 mm  
 Nominal length 85 mm

centering cap





top view




**Plastic sleeve GC 15x135 for M10**  
 Nominal diameter 15 mm  
 Nominal length 135 mm

centering cap




top view




**Plastic sleeve GC 15x85 for M10**  
 Nominal diameter 15 mm  
 Nominal length 85 mm

centering cap



top view



**Plastic sleeve GC 12x80 for M8**  
 Nominal diameter 12 mm  
 Nominal length 80 mm

centering cap



**Table A4: Plastic sleeve materials**

Part	Designation
Plastic sleeve	Polypropylene (PP) / Polyethylene (PE)
Centering cap	Polypropylene (PP) / Polyethylene (PE)

**JCP J-FIX POLYESTER STYRENE FREE**

**Product description**  
 Materials – Plastic sleeves

**Annex A6**  
 of European  
 Technical Assessment  
 ETA-25/XXXX

**Use:**

The anchors are intended to be used for anchorages for which requirements for mechanical resistance and stability in use in the sense of the Basic Requirement 1 of Regulation 305/2011 (EU) shall be fulfilled and failure of anchorages made with these products would compromise the stability of the works, cause risk to human life and/or lead to considerable economic consequences.

**Anchors subject to:**

- Static and quasi-static loads: sizes from M8 to M16 and  $\phi 8$  to  $\phi 12$

**Base materials:**

- Solid masonry (use category b)
- Hollow or perforated masonry (use category c)
- Autoclaved aerated concrete AAC masonry (use category d).

The mortar strength class of the masonry has to be M 2,5 according to EN 998-2:2010 at minimum.

For other bricks in solid masonry and in hollow masonry or in autoclaved aerated concrete, the characteristic resistance of the anchor may be determined by job site tests according to EOTA TR 053, under consideration of the  $\beta$ -factor.

**Temperature range:**

The anchors may be used in the following temperature range:

- a) -40°C to +40°C (max. short term temperature +40°C and max. long term temperature +24°C),
- b) -40°C to +50°C (max. short term temperature +50°C and max. long term temperature +40°C).

**Use conditions (Environmental conditions):**

- Structures subject to dry internal conditions: all materials according to Table A1 and Table A2, Annex A5.
- For all other conditions according to EN 1993-1-4:2006+A1:2015 corresponding to corrosion resistance class:
  - Stainless steel A2 according to Annex A5, Table A1: CRC II
  - Stainless steel A4 according to Annex A5, Table A1: CRC III
  - High corrosion resistance steel HCR according to Annex A5, Table A1: CRC V

**Installation:**

- Condition d/d: installation in dry base material and use in structures subjected to dry conditions.
- Condition w/d: installation in dry or wet base material and use in structures subjected to dry conditions.
- Condition w/w: installation in dry or wet base material and use in structures subjected to wet conditions.
- Perforation with drilling machine: hammer drilling for solid and AAC bricks, rotary drilling for hollow bricks.

**Design methods:**

- Verifiable calculation notes and drawings are prepared taking account the relevant masonry in the region of the anchorage, the loads to be transmitted and their transmission to the supports of the structure. The position of the anchor is indicated on the design drawings.
- The anchorages are designed in accordance with the EOTA TR 054, Design method A under the responsibility of an engineer experienced in anchorages and masonry work.

<b>JCP J-FIX POLYESTER STYRENE FREE</b>	<b>Annex B1</b> of European Technical Assessment ETA-25/XXXX
<b>Intended use</b> Specifications	


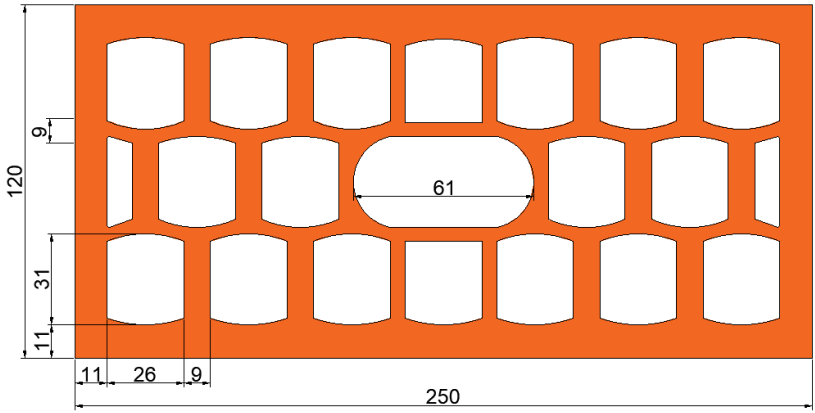

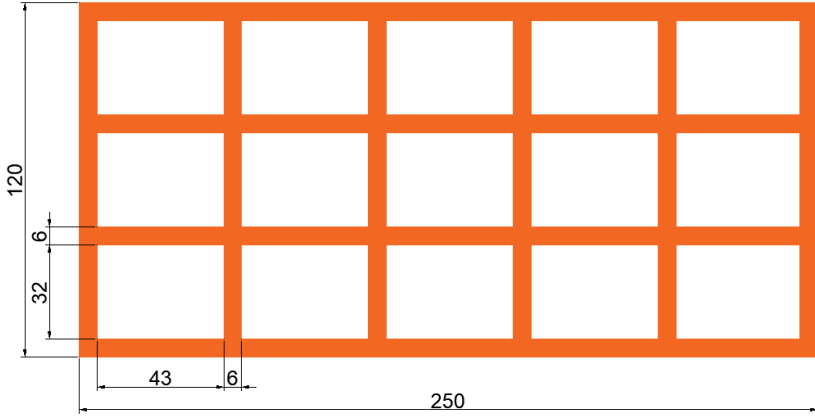

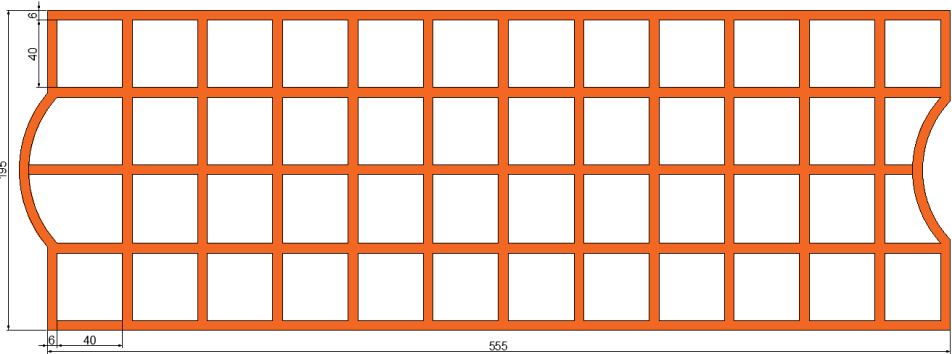
**Table B1: Brick types and properties with corresponding fastening elements**

Brick n°	Brick Name - Category Density [kg/m <sup>3</sup> ] Dimension L x B x H [mm]	Brick Picture	Steel element	Sleeve	Annex
1	<b>Solid brick (b) EN 771-1</b> Mattone Pieno $\rho=1700$ 120 x 240 x 60		M8 to M12	-	C5
2	<b>Solid brick (b) EN 771-1</b> Rosso classico $\rho=1560$ 120 x 250 x 55		M8 to M16 $\phi 8$ to $\phi 12$	-	C6-C7
3	<b>Hollow brick (c) EN 771-1</b> Mattone Doppio UNI $\rho=810$ 240 x 120 x 120		M8 to M12	GC 12x80 GC15x85 GC 20x85	C8
4	<b>Hollow brick (c) EN 771-1</b> Mattone forato $\rho=550$ 250 x 250 x 120		M8 to M12	GC 12x80 GC15x85 GC 20x85	C9
5	<b>Hollow brick (c) EN 771-1</b> Brique creuse RC 40 $\rho=600$ 555 x 195 x 275		M8 to M12	GC 12x80 GC15x85 GC 20x85	C10
<b>JCP J-FIX POLYESTER STYRENE FREE</b>			<b>Annex B2</b> of European Technical Assessment ETA-25/XXXX		
<b>Intended use</b> Brick types and properties with corresponding fastening elements (1)					

**Table B2: Brick types and properties with corresponding fastening elements**

Brick n°	Brick Name - Category Density [kg/m <sup>3</sup> ] Dimension L x B x H [mm]	Brick Picture	Steel element	Sleeve	Annex
6	<b>Hollow brick (c) EN 771-1</b> Porotherm 25 P+W $\rho=800$ 373 x 238 x 250		M8 to M12	GC 12x80 GC15x85 GC 20x85	C11
7	<b>Hollow brick (c) EN 771-1</b> Hz B – 1.0 1NF 12-1 $\rho=900$ 115 x 240 x 71		M8 to M12	GC 12x80 GC15x85 GC 20x85	C12
8	<b>Hollow brick (c) EN 771-1</b> Poroton $\rho=900$ 300 x 245 x 230		M10	GC15x135	C13
9	<b>AAC2 (d) EN 771-4</b> Climagold $\rho=300$ 625 x 200 x 360		M8 to M16	-	C14
10	<b>AAC5 (d) EN 771-4</b> Blocco sismico $\rho=575$ 625 x 200 x 300		M8 to M16	-	C15
<b>JCP J-FIX POLYESTER STYRENE FREE</b>			<b>Annex B3</b> of European Technical Assessment ETA-25/XXXX		
<b>Intended use</b> Brick types and properties with corresponding fastening elements (2)					

**Table B3: Brick types and properties with corresponding fastening elements**


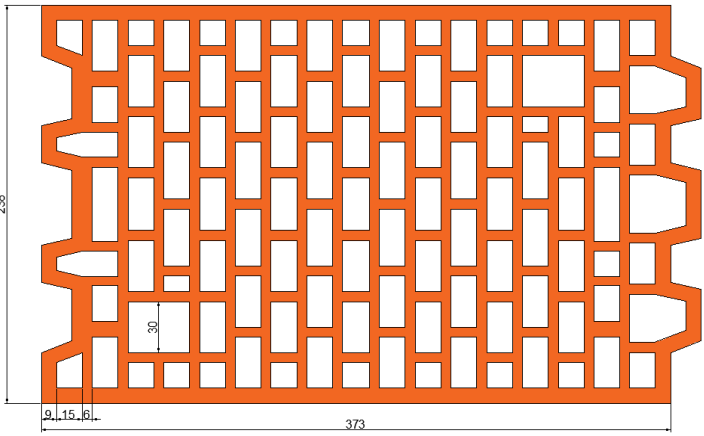

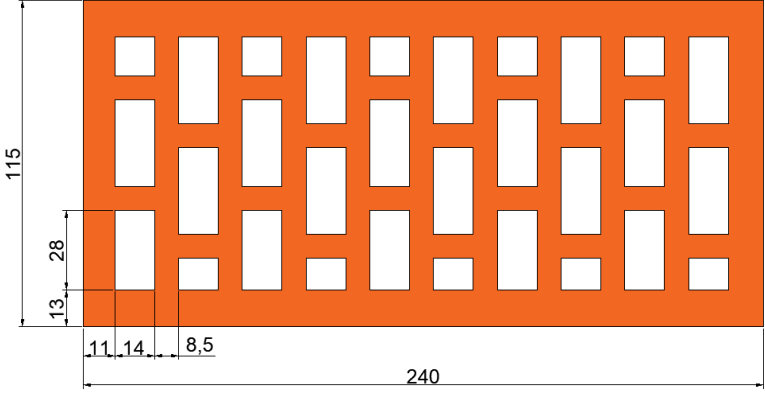

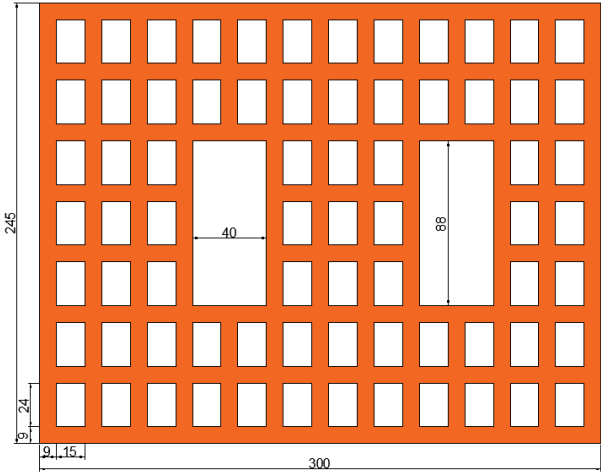
<p><b>Hollow brick (c)</b> <b>EN 771-1</b> Mattone Doppio UNI</p> 	
<p><b>Hollow brick (c)</b> <b>EN 771-1</b> Mattone forato</p> 	
<p><b>Hollow brick (c)</b> <b>EN 771-1</b> Brique creuse RC 40</p> 	

**JCP J-FIX POLYESTER STYRENE FREE**

**Intended use**  
Details for hollow bricks (1)

**Annex B4**  
of European  
Technical Assessment  
ETA-25/XXXX

**Table B4: Brick types and properties with corresponding fastening elements**

<p><b>Hollow brick (c)</b>  <b>EN 771-1</b>                  Porotherm 25 P+W</p> 		
<p><b>Hollow brick (c)</b>  <b>EN 771-1</b>                  Hz B – 1.0 1NF 12-1</p> 		
<p><b>Hollow brick (c)</b>  <b>EN 771-1</b>                  Poroton P800</p> 		
<p><b>JCP J-FIX POLYESTER STYRENE FREE</b></p>		<p><b>Annex B5</b>                  of European                  Technical Assessment                  ETA-25/XXXX</p>
<p><b>Intended use</b>                  Details for hollow bricks (2)</p>		

**Table B5 Installation data for solid masonry (brick n°1)\***

Size		M8	M10	M12
Nominal drilling diameter	$d_0$ [mm]	10	12	14
Maximum diameter hole in the fixture	$d_{fix}$ [mm]	9	12	14
Embedment depth	$h_{ef}$ [mm]	80	85	95
Depth of the drilling hole	$h_1$ [mm]	$h_{ef} + 5$ mm		
Minimum wall thickness	$h_{min}$ [mm]	$h_{ef} + 30$ mm		
Torque moment	$T_{inst}$ [Nm]	5	8	10
Minimum spacing	$S_{min}$ [mm]	240	255	285
Minimum edge distance	$C_{min}$ [mm]	120	128	143

\* Type of bricks are detailed in the Annex B2

**Table B6 Installation data for solid masonry (brick n°2)\***

Size		M8- $\phi$ 8	M10- $\phi$ 10	M12- $\phi$ 12	M16
Nominal drilling diameter	$d_0$ [mm]	10	12	14	18
Maximum diameter hole in the fixture	$d_{fix}$ [mm]	9	12	14	18
Embedment depth	$h_{ef}$ [mm]	80	85	95	105
Depth of the drilling hole	$h_1$ [mm]	$h_{ef} + 5$ mm			
Minimum wall thickness	$h_{min}$ [mm]	$h_{ef} + 30$ mm			
Torque moment	$T_{inst}$ [Nm]	5	8	10	10
Minimum spacing	$S_{min}$ [mm]	50	50	50	60
Minimum edge distance	$C_{min}$ [mm]	50	50	50	60

\* Type of bricks are detailed in the Annex B2

**JCP J-FIX POLYESTER STYRENE FREE****Intended use**  
Installation data on solid bricks**Annex B6**  
of European  
Technical Assessment  
ETA-25/XXXX

**Table B7: Installation data for hollow/perforated masonry (brick n° 3 to 8)\***

Size		M8	M10	M10	M12
Plastic sleeve		GC 12x80	GC 15x85	GC 15x135	GC 20x85
Nominal drilling diameter	$d_0$ [mm]	12	16	16	20
Maximum diameter hole in the fixture	$d_{fix}$ [mm]	9	12	12	14
Embedment depth	$h_{ef}$ [mm]	80	85	135	85
Depth of the drilling hole	$h_1$ [mm]	$h_{ef} + 5$ mm			
Minimum wall thickness	$h_{min}$ [mm]	$h_{ef} + 30$ mm			
Torque moment	$T_{inst}$ [Nm]	3	4	4	6
Minimum spacing	$S_{min}$ [mm]	See Annex C8 to C13			
Minimum edge distance	$C_{min}$ [mm]				

\* Type of bricks are detailed in the Annex B2-B3

**Table B8 Installation data for AAC masonry (brick n°9-10)\***

Size		M8	M10	M12	M16
Nominal drilling diameter	$d_0$ [mm]	10	12	14	18
Maximum diameter hole in the fixture	$d_{fix}$ [mm]	9	12	14	18
Embedment depth	$h_{ef}$ [mm]	80	85	95	105
Depth of the drilling hole	$h_1$ [mm]	$h_{ef} + 5$ mm			
Minimum wall thickness	$h_{min}$ [mm]	$h_{ef} + 30$ mm			
Torque moment	$T_{inst}$ [Nm]	2			
Minimum spacing	$S_{min}$ [mm]	50	50	50	60
Minimum edge distance	$C_{min}$ [mm]	50	50	50	60

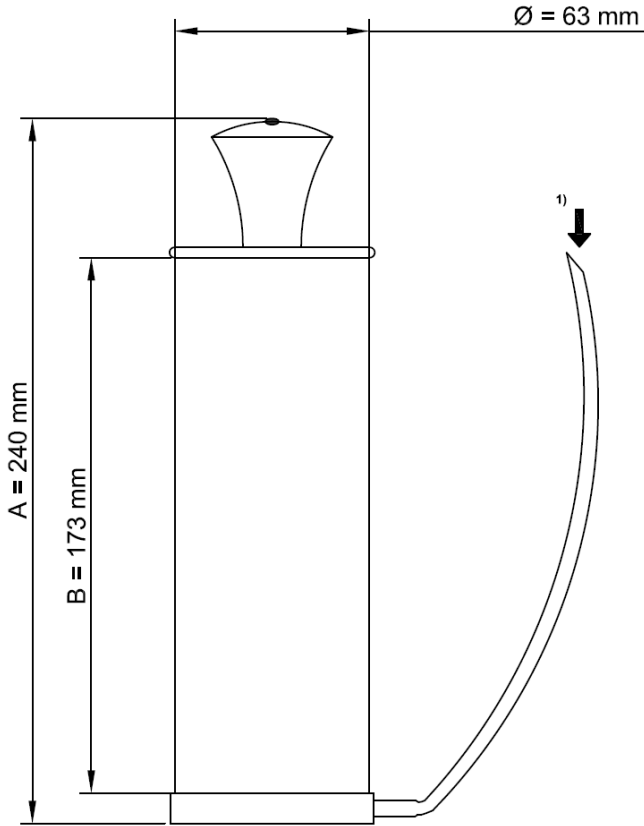
\* Type of bricks are detailed in the Annex B3

**JCP J-FIX POLYESTER STYRENE FREE**

**Intended use**  
Installation data on hollow bricks and AAC bricks

**Annex B7**  
of European  
Technical Assessment  
ETA-25/XXXX

**Manual blower pump: nominal dimensions**



**It is possible to use the mixer extension with the manual blower pump.**

**However it is possible to blow the hole using the mechanical air system (compressed air) also with the mixer extension**



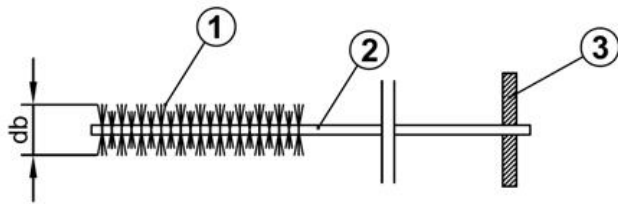
**Suitable min pressure 6 bar at 6 m<sup>3</sup>/h  
Oil-free compressed air  
Recommended air gun with an orifice opening of minimum 3.5 mm in diameter**

1) Position to Insert the mixer extension



**Mixer extension (from 380 mm to 1000 mm) with nominal diameter equal to 10 mm**

<b>JCP J-FIX POLYESTER STYRENE FREE</b>	<b>Annex B8</b> of European Technical Assessment ETA-25/XXXX
<b>Intended use</b> Cleaning and installation accessories (1)	



- ① Steel bristles
- ② Steel stem
- ③ Wood handle

**Table B9: Brush diameter for solid masonry and AAC**

			Use in solid masonry and AAC			
Type of threaded rod			M8-φ8	M10-φ10	M12-φ12	M16
<b>d<sub>0</sub></b>	Nominal drill hole	[mm]	10	12	14	18
<b>d<sub>b</sub></b>	Brush diameter	[mm]	12	14	16	20

**Table B10: Brush diameter for hollow/perforated masonry**






			Use in hollow/perforated masonry			
Type of threaded rod			M8	M10	M10	M12
Type of plastic sleeve			GC12x80	GC 15x85	GC 15x135	GC 20x85
<b>d<sub>0</sub></b>	Nominal drill hole	[mm]	16	16	16	20
<b>d<sub>b</sub></b>	Brush diameter	[mm]	16	16	16	20

**JCP J-FIX POLYESTER STYRENE FREE**

**Intended use**  
Cleaning and installation accessories (2)

**Annex B9**  
of European  
Technical Assessment  
ETA-25/XXXX

**Table B11: Mortar injection dispenser**

Injection dispensers	Cartridges
 <p><i>Manual</i></p>	<p>420 ml 400 ml 380 ml</p>
 <p><i>Manual</i></p>	<p>345 ml 300 ml 280 ml 165 ml</p>
 <p><i>Manual</i></p>	<p>300 ml 280 ml 165 ml</p>
 <p><i>Pneumatic</i></p>	<p>420 ml 400 ml 380 ml</p>
 <p><i>Battery</i></p>	<p>420 ml 400 ml 380 ml 345 ml 300 ml</p>

**JCP J-FIX POLYESTER STYRENE FREE**

**Intended use**  
Cleaning and installation accessories (3)

**Annex B10**  
of European  
Technical Assessment  
ETA-25/XXXX

**Table B12: Minimum curing time<sup>1)3)</sup>**


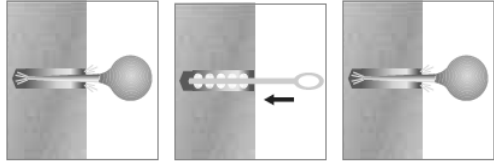
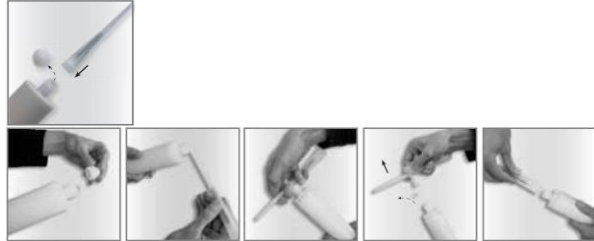
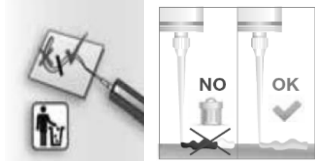

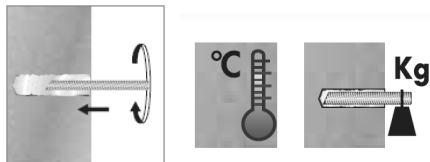
Masonry temperature	Processing time	Minimum curing time <sup>1)3)</sup>
-5°C <sup>2)</sup>	30 min	360 min
0°C <sup>2)</sup>	25 min	180 min
5°C <sup>2)</sup>	15 min	120 min
10°C	12 min	90 min
15°C	8 min	60 min
20°C	6 min	45 min
25°C	4 min	30 min
30°C	3 min	20 min
40°C	1 min	20 min







- 1) the minimum time from the end of the mixing to the time when the anchor may be torque or loaded
- 2) minimum resin temperature recommended, for injection between 5°C and -5°C, equal to 10°C.
- 3) minimum curing time for dry and wet conditions.

**JCP J-FIX POLYESTER STYRENE FREE**

**Intended use**  
Processing time and curing time

**Annex B11**  
of European  
Technical Assessment  
ETA-25/XXXX

1		<p>Drill the hole with the correct diameter and depth using a <b>rotary-hammer drilling machine</b>. Check the perpendicularity of the hole during the drilling operation.</p>
2	 <p style="text-align: center;"><b>4x                      4x                      4x</b></p> <p style="text-align: center;"><b>Blower Pump      Brush                      Blower Pump</b></p> <p>(instead of the blower manual pump it is also possible to use the compressed air free oil)</p>	<p>Clean the hole from drilling dust: The hole shall be cleaned by at least 4 blowing operations, by at least 4 brushing operations followed again by at least 4 blowing operations (<b>2x2x2 for AAC</b>). Before brushing clean the brush and check (see Table B9 in Annex B9) if the brush diameter is sufficient. For the blower tools see Annex B8.</p>
3		<p>For coaxial, side by side and peeler cartridges unscrew the front cup, screw on the mixer and insert the cartridge in the gun. For the size 300 ml and 165 ml, unscrew the front cup, pull-out the steel closing clip according to the following operations:</p> <ul style="list-style-type: none"> <li>- insert the mixer in the eye of the plastic extractor,</li> <li>- pull the extractor to unhook the steel closing clip of the foil.</li> </ul> <p>In the version without extractor cut the foil pack. After that, screw on the mixer and insert the cartridge in the dispenser.</p>
4		<p>Before starting to use the cartridge, eject a first part of the product, being sure that the two components are completely mixed. The complete mixing is reached only after that the product, obtained by mixing the two components, comes out from the mixer with a uniform color.</p>
5		<p>Fill the drilled hole uniformly starting from the drilled hole bottom, in order to avoid entrapment of the air; remove the mixer slowly bit by bit during pressing-out; filling the drill hole with a quantity of the injection mortar corresponding to 2/3 of the drill hole depth.</p>
6		<p>Insert immediately the rod, marked according to the proper anchorage depth, slowly and with a slight twisting motion, removing excess of injection mortar around the rod. Observe the processing time according Annex B11. Wait the curing time according Annex B11.</p>
<p><b>JCP J-FIX POLYESTER STYRENE FREE</b></p>		<p><b>Annex B12</b> of European Technical Assessment ETA-25/XXXX</p>
<p><b>Intended use</b> Procedure for solid masonry and AAC masonry</p>		

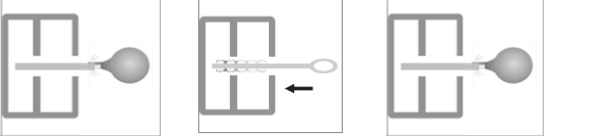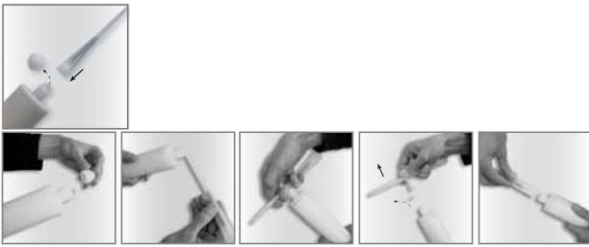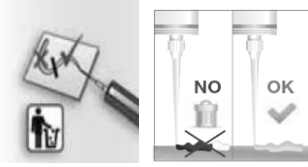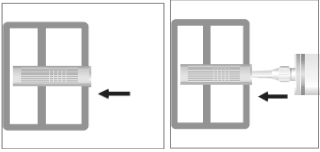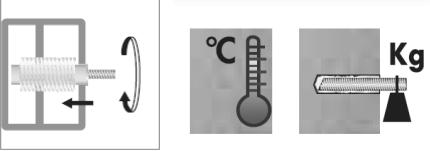1		<p>Drill the hole with the correct diameter and depth using a <b>rotary drilling machine</b>. Check the perpendicularity of the hole during the drilling operation.</p>
2	 <p style="text-align: center;"><b>4x Blower Pump      2x Brush      4x Blower Pump</b></p> <p>(instead of the blower manual pump it is also possible to use the compressed air free oil)</p>	<p>Clean the hole from drilling dust: The hole shall be cleaned by at least 4 blowing operations, by at least 2 brushing operations followed again by at least 4 blowing operations; before brushing clean the brush and check (see Table B10 in Annex B9) if the brush diameter is sufficient. For the blower tools see Annex B8.</p>
3		<p>For coaxial, side by side and peeler cartridges unscrew the front cup, screw on the mixer and insert the cartridge in the gun. For the size 300 ml and 165 ml, unscrew the front cup, pull-out the steel closing clip according to the following operations:</p> <ul style="list-style-type: none"> <li>- insert the mixer in the eye of the plastic extractor,</li> <li>- pull the extractor to unhook the steel closing clip of the foil.</li> </ul> <p>In the version without extractor cut the foil pack. After that, screw on the mixer and insert the cartridge in the dispenser.</p>
4		<p>Before starting to use the cartridge, eject a first part of the product, being sure that the two components are completely mixed. The complete mixing is reached only after that the product, obtained by mixing the two components, comes out from the mixer with a uniform color.</p>
5		<p>Remove the centering cap from the plastic sleeve. Insert in the hole the plastic sleeve (see Annex A6). Fill the sleeve uniformly starting from the sleeve bottom. Remove the mixer slowly bit by bit during pressing-out: remove the mixer about 10 mm for each pressing operation. Filling the sleeve completely.</p>
6		<p>Put on the centering cup on the filled plastic sleeve. Insert immediately the rod, marked according to the proper anchorage depth, slowly and with a slight twisting motion, removing excess of injection mortar around the rod. Observe the processing time according Annex B11. Wait the curing time according Annex B11.</p>
<p><b>JCP J-FIX POLYESTER STYRENE FREE</b></p>		<p><b>Annex B13</b> of European Technical Assessment ETA-25/XXXX</p>
<p><b>Intended use</b> Procedure for hollow/perforated masonry</p>		

**Table C1:  $\beta$ -factors for job-site testing under tension loading**

<b>Brick</b>	<b>Installation and use conditions</b>	<b>Anchor size</b>	<b><math>\beta</math>-factors</b>
Brick n°1	d/d - w/d - w/w	M8-M10-M12	0,85
Brick n°2	d/d - w/d - w/w	M8 to M16 and $\phi$ 8 to $\phi$ 12	0,85
Brick n°3-4-5-6-7	d/d - w/d - w/w	M8+GC 12x80 M10+GC 15x85 M12+GC 20x85	0,85
Brick n°8	d/d - w/d - w/w	M10+GC 15x135	0,85
Brick n° 9-10	d/d - w/d - w/w	M8 to M16	0,89

**JCP J-FIX POLYESTER STYRENE FREE**

**Intended use**  
 $\beta$ -factors for job site testing under tension load

**Annex C1**  
of European  
Technical Assessment  
ETA-25/XXXX

**Table C2: Characteristic values for steel: tension resistance and shear resistance for threaded rods and rebar**

Size			M8	M10	M12	M16
<b>Steel failure – characteristic tension resistance</b>						
Steel class 4.8	$N_{Rk,s}$	[kN]	15	23	34	63
Steel class 5.8	$N_{Rk,s}$	[kN]	18	29	42	78
Steel class 8.8	$N_{Rk,s}$	[kN]	29	46	67	126
Stainless steel A2, A4, HCR class 50	$N_{Rk,s}$	[kN]	18	29	42	78
Stainless steel A2, A4, HCR class 70	$N_{Rk,s}$	[kN]	26	41	59	110
Stainless steel A4, HCR class 80	$N_{Rk,s}$	[kN]	29	46	67	126
<b>Steel failure – characteristic tension resistance – partial factor</b>						
Steel class 4.8 – 5.8 – 8.8	$\gamma_{Ms,N}^{1)}$	[-]	1,50			
Stainless steel A2, A4, HCR class 50	$\gamma_{Ms,N}^{1)}$	[-]	2,86			
Stainless steel A2, A4, HCR class 70	$\gamma_{Ms,N}^{1)}$	[-]	1,87			
Stainless steel A4, HCR class 80	$\gamma_{Ms,N}^{1)}$	[-]	1,60			
<b>Steel failure – characteristic shear resistance without lever arm</b>						
Steel class 4.8	$V_{Rk,s}^0$	[kN]	7	12	17	31
Steel class 5.8	$V_{Rk,s}^0$	[kN]	9	14	21	39
Steel class 8.8	$V_{Rk,s}^0$	[kN]	15	23	34	63
Stainless steel A2, A4, HCR class 50	$V_{Rk,s}^0$	[kN]	9	14	21	39
Stainless steel A2, A4, HCR class 70	$V_{Rk,s}^0$	[kN]	13	20	29	55
Stainless steel A4, HCR class 80	$V_{Rk,s}^0$	[kN]	15	23	34	63
<b>Steel failure – characteristic shear resistance with lever arm</b>						
Steel class 4.8	$M_{Rk,s}^0$	[Nm]	15	30	52	133
Steel class 5.8	$M_{Rk,s}^0$	[Nm]	19	37	65	166
Steel class 8.8	$M_{Rk,s}^0$	[Nm]	30	60	105	266
Stainless steel A2, A4, HCR class 50	$M_{Rk,s}^0$	[Nm]	19	37	66	166
Stainless steel A2, A4, HCR class 70	$M_{Rk,s}^0$	[Nm]	26	52	92	233
Stainless steel A4, HCR class 80	$M_{Rk,s}^0$	[Nm]	30	60	105	266
<b>Steel failure – characteristic shear resistance – partial factor</b>						
Steel class 4.8 – 5.8 – 8.8	$\gamma_{Ms,V}^{1)}$	[-]	1,25			
Stainless steel A2, A4, HCR class 50	$\gamma_{Ms,V}^{1)}$	[-]	2,38			
Stainless steel A2, A4, HCR class 70	$\gamma_{Ms,V}^{1)}$	[-]	1,56			
Stainless steel A4, HCR class 80	$\gamma_{Ms,V}^{1)}$	[-]	1,33			
Size			$\phi 8$	$\phi 10$	$\phi 12$	
<b>Steel failure for reinforced bar (rebar)</b>						
Characteristic tensile resistance	$N_{Rk,s}$	[kN]	$A_s \times f_{uk}^{2)}$			
Cross section area	$A_s$	[mm <sup>2</sup> ]	50	79	113	
Partial factor	$\gamma_{Ms,N}^{1)}$	[-]	1,4			
Characteristic shear resistance	$V_{Rk,s}^0$	[kN]	$0,5 \times A_s \times f_{uk}^{2)}$			
Partial factor	$\gamma_{Ms,V}^{1)}$	[-]	1,5			

1) In the absence of national regulation

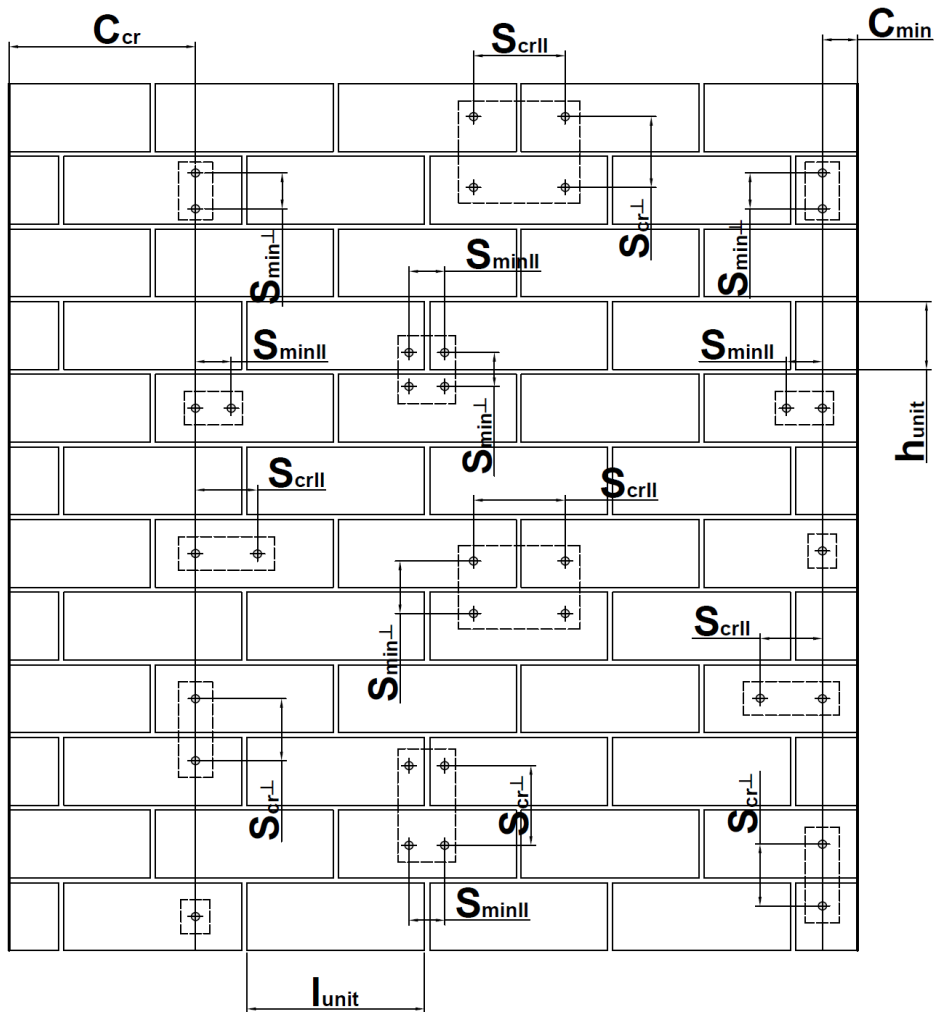
2)  $f_{uk}$  shall take from the specifications of the reinforcing bars

**JCP J-FIX POLYESTER STYRENE FREE**

**Intended use**  
Performance for static and quasi-static loads: Steel resistances

**Annex C2**  
of European  
Technical Assessment  
ETA-25/XXXX

**Spacing and edge distance**



$c_{cr}$  = Characteristic edge distance

$c_{min}$  = Minimum edge distance

$s_{cr||}$  = Characteristic spacing for anchors placed parallel to horizontal joint

$s_{cr\perp}$  = Characteristic spacing for anchors placed perpendicular to horizontal joint

$s_{min||}$  = Minimum spacing for anchors placed parallel to horizontal joint

$s_{min\perp}$  = Minimum spacing for anchors placed perpendicular to horizontal joint

$l_{unit}$  = Length of the masonry unit







$h_{unit}$  = Height of the masonry unit

**JCP J-FIX POLYESTER STYRENE FREE**

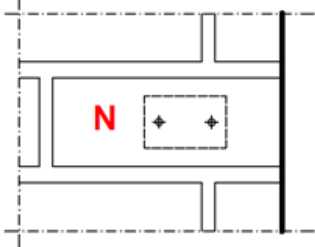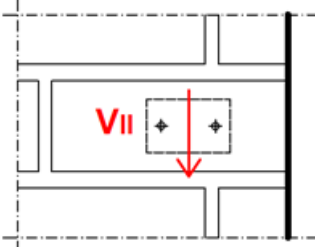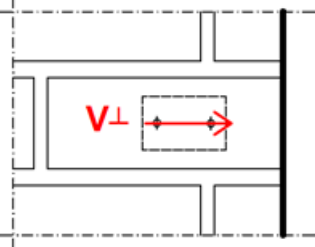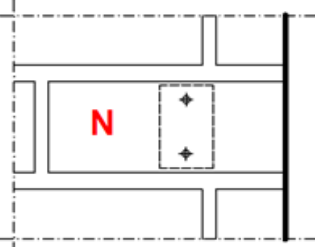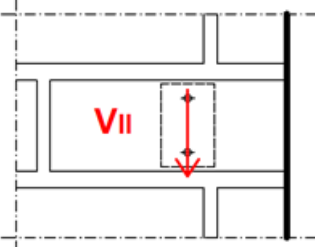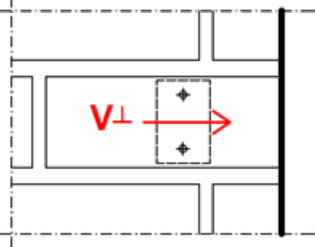**Intended use**  
Anchor spacing and edge distance

**Annex C3**  
of European  
Technical Assessment  
ETA-25/XXXX

**Group factor**

Load Direction \ Anchor Position	N Tension Load	V <sub>  </sub> Shear load Parallel to free edge	V <sub>⊥</sub> Shear load perpendicular to free edge
<b>Anchors parallel to horizontal joint</b>	 $\alpha_{g \parallel, N}$	 $\alpha_{g \parallel, V \parallel}$	 $\alpha_{g \parallel, V \perp}$
<b>Anchors perpendicular to horizontal joint</b>	 $\alpha_{g \perp, N}$	 $\alpha_{g \perp, V \parallel}$	 $\alpha_{g \perp, V \perp}$

$\alpha_{g \parallel, N}$  = Group factor for anchors parallel to horizontal joint under tension load

$\alpha_{g \perp, N}$  = Group factor for anchors perpendicular to horizontal joint under tension load

$\alpha_{g \parallel, V \parallel}$  = Group factor for anchors parallel to horizontal joint under shear load parallel to the free edge

$\alpha_{g \perp, V \parallel}$  = Group factor for anchors perpendicular to horizontal joint under shear load parallel to the free edge

$\alpha_{g \parallel, V \perp}$  = Group factor for anchors parallel to horizontal joint under shear load perpendicular to the free edge

$\alpha_{g \perp, V \perp}$  = Group factor for anchors perpendicular to hor. joint under shear load perpendicular to the free edge

Group of 2 anchors:  $N_{Rk}^g = \alpha_{g,N} * N_{Rk,b}$

$$V_{Rk}^g = \alpha_{g,V} * V_{Rk,b}$$

Group of 4 anchors:  $N_{Rk}^g = \alpha_{g \parallel, N} * \alpha_{g \perp, N} * N_{Rk,b}$

$$V_{Rk}^g = \alpha_{g \parallel, V} * \alpha_{g \perp, V} * V_{Rk,b}$$

Equations depend on anchor position and load direction (see table above).


**JCP J-FIX POLYESTER STYRENE FREE**

**Intended use**  
Group factor

**Annex C4**  
of European  
Technical Assessment  
ETA-25/XXXX

**Brick type: Solid Brick – Mattone Pieno**

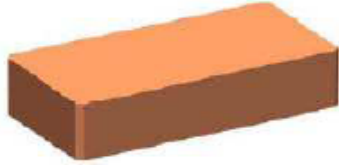**Table C3: Description**

Brick Type	Mattone Pieno	
Compressive strength [N/mm <sup>2</sup> ]	≥ 73	
Brick Dimensions [mm]	≥ 240 x 120 x 60	
Drilling method	Hammer drilling	

**Table C4: Installation parameter (Edge and spacing distances)**

Diameter	Setting depth [mm]	Edge distance [mm]	Spacing [mm]
		$C_{min}=C_{cr}$	$S_{min}=S_{cr,I}=S_{cr,II}$
M8	80	120	240
M10	85	128	255
M12	95	143	285

**Table C5: Characteristic values of resistance under tension and shear loads**

Diameter	Setting depth [mm]	Category d/d, w/d and w/w Temperature range -40°C/+24°C/+40°C and -40°C/+40°C/+50°C	
		$N_{Rk}$ [kN]	$V_{Rk,b}$ [kN]
M8	80	1,50	4,50
M10	85	3,00	9,00
M12	95	3,00	9,00

1) For design according TR 054:  $N_{Rk} = N_{Rk,p} = N_{Rk,b}$ ;  $N_{Rk,s}$  according to Table C2 Annex C2; Calculation  $N_{Rk,pb}$  see TR 054  
 2) For  $V_{Rk,s}$  see Annex C2, Table C2; Calculation of  $V_{Rk,pb}$  and  $V_{Rk,c}$  see TR 054

**Table C6: Displacements**

Diameter	Setting depth [mm]	Displacement under service load Tensile and shear load					
		F [kN]	$\delta_{N0}$ [mm]	$\delta_{N\infty}$ [mm]	F [kN]	$\delta_{V0}$ [mm]	$\delta_{V\infty}$ [mm]
M8	80	0,65	0,08	0,16	1,32	0,23	0,34
M10	85	1,03	0,07	0,16	2,94	0,48	0,72
M12	95	1,15	0,06	0,16	2,62	0,38	0,57

**Table C7: Group factor**


Configuration	Tensile		Shear parallel to free edge		Shear perpendicular to free edge	
	$\alpha_{g II, N}$	$\alpha_{g L, N}$	$\alpha_{g II, V II}$	$\alpha_{g L, V II}$	$\alpha_{g II, V \perp}$	$\alpha_{g L, V \perp}$
$S \geq S_{cr}$ and $C \geq C_{cr}$	2,0	2,0	2,0	2,0	2,0	2,0

**JCP J-FIX POLYESTER STYRENE FREE**

**Intended use**  
Performance on solid brick n°1: Resistances and displacements

**Annex C5**  
of European  
Technical Assessment  
ETA-25/XXXX

**Brick type: Solid Brick – Mattone Rosso Classico****Table C8: Description**

Brick Type	Mattone Rosso Classico	
Compressive strength [N/mm <sup>2</sup> ]	≥ 21	
Brick Dimensions [mm]	≥ 250 x 120 x 55	
Drilling method	Hammer drilling	

**Table C9: Installation parameter (Edge and spacing distances)**

Diameter	Setting depth [mm]	Edge distance [mm]		Spacing [mm]	
		C <sub>min</sub>	C <sub>cr</sub>	S <sub>min</sub>	Scr,I= Scr,II
M8	80	50	120	50	240
M10	85	50	128	50	255
M12	95	50	143	50	285
M16	105	60	158	60	315

**Table C10: Characteristic values of resistance under tension and shear loads**

Diameter	Setting depth [mm]	Category d/d, w/d and w/w Temperature range -40°C/+24°C/+40°C and -40°C/+40°C/+50°C			
		N <sub>Rk</sub> [kN]		V <sub>Rk,b</sub> [kN]	
		C=C <sub>min</sub> - S=S <sub>min</sub>	C=C <sub>cr</sub> - S=S <sub>cr</sub>	C=C <sub>min</sub> - S=S <sub>min</sub>	C=C <sub>cr</sub> - S=S <sub>cr</sub>
M8	80	2,00	2,00	4,50	5,50
M10	85	2,50	2,50	8,00	8,50
M12	95	3,00	3,50	11,00	11,50
M16	105	3,50	4,00	13,00	13,50

1) For design according TR 054: N<sub>Rk</sub> = N<sub>Rk,p</sub> = N<sub>Rk,b</sub>; N<sub>Rk,s</sub> according to Table C2 Annex C2; Calculation N<sub>Rk,pb</sub> see TR 054

2) For V<sub>Rk,s</sub> see Annex C2, Table C2; Calculation of V<sub>Rk,pb</sub> and V<sub>Rk,c</sub> see TR 054

**Table C11: Displacements**

Diameter	Setting depth [mm]	Displacement under service load Tensile and shear load					
		F [kN]	δ <sub>N0</sub> [mm]	δ <sub>N∞</sub> [mm]	F [kN]	δ <sub>V0</sub> [mm]	δ <sub>V∞</sub> [mm]
M8	80	0,71	0,08	0,16	1,62	0,27	0,41
M10	85	0,97	0,10	0,20	2,50	0,30	0,45
M12	95	1,31	0,11	0,22	3,42	0,34	0,51
M16	105	1,48	0,13	0,26	3,87	0,35	0,53

**Table C12: Group factor**


Configuration	Tensile		Shear parallel to free edge		Shear perpendicular to free edge	
	α <sub>g,II,N</sub>	α <sub>g,L,N</sub>	α <sub>g,II,V,II</sub>	α <sub>g,L,V,II</sub>	α <sub>g,II,V,I</sub>	α <sub>g,L,V,I</sub>
S ≥ S <sub>min</sub> and C ≥ C <sub>min</sub>	2,0	2,0	2,0	2,0	2,0	2,0

**JCP J-FIX POLYESTER STYRENE FREE**

**Intended use**  
Performance on solid brick n°2: Resistances and displacements

**Annex C6**  
of European  
Technical Assessment  
ETA-25/XXXX

**Brick type: Solid Brick – Mattone Rosso Classico****Table C13: Description**

Brick Type	Mattone Rosso Classico	
Compressive strength [N/mm <sup>2</sup> ]	≥ 15	
Brick Dimensions [mm]	≥ 250 x 120 x 55	
Drilling method	Hammer drilling	

**Table C14: Installation parameter (Edge and spacing distances)**

Diameter	Setting depth [mm]	Edge distance [mm]		Spacing [mm]	
		C <sub>min</sub>	C <sub>cr</sub>	S <sub>min</sub>	S <sub>cr,I</sub> = S <sub>cr,II</sub>
φ8	80	50	120	50	240
φ10	85	50	128	50	255
φ12	95	50	143	50	285

**Table C15: Characteristic values of resistance under tension and shear loads**

Diameter	Setting depth [mm]	Category d/d, w/d and w/w Temperature range -40°C/+24°C/+40°C and -40°C/+40°C/+50°C			
		N <sub>Rk</sub> [kN]		V <sub>Rk,b</sub> [kN]	
		c=C <sub>min</sub> – s=S <sub>min</sub>	c=C <sub>cr</sub> – s=S <sub>cr</sub>	c=C <sub>min</sub> – s=S <sub>min</sub>	c=C <sub>cr</sub> – s=S <sub>cr</sub>
φ8	80	2,00	2,00	4,50	5,50
φ10	85	3,00	3,00	8,00	8,00
φ12	95	3,00	3,50	11,00	11,50

1) For design according TR 054: N<sub>Rk</sub> = N<sub>Rk,p</sub> = N<sub>Rk,b</sub>; N<sub>Rk,s</sub> according to Table C2 Annex C2; Calculation N<sub>Rk,pb</sub> see TR 054

2) For V<sub>Rk,s</sub> see Annex C2, Table C2; Calculation of V<sub>Rk,pb</sub> and V<sub>Rk,c</sub> see TR 054

**Table C16: Displacement**

Diameter	Setting depth [mm]	Displacement under service load Tensile and shear load					
		F [kN]	δ <sub>N0</sub> [mm]	δ <sub>N∞</sub> [mm]	F [kN]	δ <sub>V0</sub> [mm]	δ <sub>V∞</sub> [mm]
φ8	80	0,81	0,12	0,24	1,63	0,29	0,44
φ10	85	1,08	0,13	0,26	2,31	0,34	0,51
φ12	95	1,21	0,15	0,30	3,33	0,38	0,57

**Table C17: Group factor**

Configuration	Tensile		Shear parallel to free edge		Shear perpendicular to free edge	
	α <sub>g,II,N</sub>	α <sub>g,I,N</sub>	α <sub>g,II,V,II</sub>	α <sub>g,I,V,II</sub>	α <sub>g,II,V,I</sub>	α <sub>g,I,V,I</sub>
S ≥ S <sub>min</sub> and C ≥ C <sub>min</sub>	2,0	2,0	2,0	2,0	2,0	2,0

**JCP J-FIX POLYESTER STYRENE FREE**

**Intended use**  
Performance on solid brick n°2: Resistances and displacements

**Annex C7**  
of European  
Technical Assessment  
ETA-25/XXXX

**Brick type: Hollow/Perforated Brick – Mattone DOPPIO UNI****Table C18: Description**

Brick Type	Mattone DOPPIO UNI	
Compressive strength [N/mm <sup>2</sup> ]	≥ 18,3	
Brick Dimensions [mm]	≥ 240 x 120 x 120	
Drilling method	Rotary drilling	

**Table C19: Installation parameter (Edge and spacing distances)**

Diameter	Setting depth [mm]	Plastic sleeve dxL [mm]	Edge distance [mm]		Spacing [mm]	
			C <sub>min</sub>	C <sub>cr</sub>	S <sub>min,II</sub> = S <sub>cr,II</sub>	S <sub>min,⊥</sub> = S <sub>cr,⊥</sub>
M8	80	12x80	120	120	240	120
M10	85	15x85	120	120	240	120
M12	85	20x85	120	120	240	120

**Table C20: Characteristic values of resistance under tension and shear loads**

Diameter	Setting depth [mm]	Plastic sleeve dxL [mm]	Category d/d, w/d and w/w Temperature range -40°C/+24°C/+40°C and -40°C/+40°C/+50°C	
			N <sub>Rk</sub> [kN]	V <sub>Rk,b</sub> [kN]
M8	80	12x80	4,00	6,00
M10	85	15x85	5,00	6,50
M12	85	20x85	5,50	9,00

1) For design according TR 054:  $N_{Rk} = N_{Rk,p} = N_{Rk,b}$ ;  $N_{Rk,s}$  according to Table C2 Annex C2; Calculation  $N_{Rk,pb}$  see TR 054

2) For  $V_{Rk,s}$  see Annex C2, Table C2; Calculation of  $V_{Rk,pb}$  and  $V_{Rk,c}$  see TR 054

**Table C21: Displacement**

Diameter	Setting depth [mm]	Displacement under service load Tensile and shear load					
		F [kN]	δ <sub>N0</sub> [mm]	δ <sub>N∞</sub> [mm]	F [kN]	δ <sub>V0</sub> [mm]	δ <sub>V∞</sub> [mm]
M8	80	1,48	0,06	0,16	1,72	0,20	0,30
M10	85	1,81	0,08	0,16	2,03	0,38	0,57
M12	85	2,09	0,10	0,20	2,93	0,34	0,51

**Table C22: Group factor**

Configuration	Tensile		Shear parallel to free edge		Shear perpendicular to free edge	
	α <sub>g II, N</sub>	α <sub>g L, N</sub>	α <sub>g II, V II</sub>	α <sub>g L, V II</sub>	α <sub>g II, V⊥</sub>	α <sub>g L, V⊥</sub>
<b>S ≥ S<sub>cr</sub> and C ≥ C<sub>cr</sub></b>	2,0	2,0	2,0	2,0	2,0	2,0


**JCP J-FIX POLYESTER STYRENE FREE**

**Intended use**  
Performance on hollow brick n°3: Resistances and displacements

**Annex C8**  
of European  
Technical Assessment  
ETA-25/XXXX

**Brick type: Hollow/Perforated Brick – Mattone Forato**

**Table C23: Description**

Brick Type	Mattone Forato	
Compressive strength [N/mm <sup>2</sup> ]	≥ 5,3	
Brick Dimensions [mm]	≥ 250 x 120 x 250	
Drilling method	Rotary drilling	

**Table C24: Installation parameter (Edge and spacing distances)**

Diameter	Setting depth [mm]	Plastic sleeve dxL [mm]	Edge distance [mm]		Spacing [mm]	
			C <sub>min</sub>	C <sub>cr</sub>	S <sub>min,II</sub> = S <sub>cr,II</sub>	S <sub>min,⊥</sub> = S <sub>cr,⊥</sub>
M8	80	12x80	125	125	250	250
M10	85	15x85	125	125	250	250
M12	85	20x85	125	125	250	250

**Table C25: Characteristic values of resistance under tension and shear loads**

Diameter	Setting depth [mm]	Plastic sleeve dxL [mm]	Category d/d, w/d and w/w Temperature range -40°C/+24°C/+40°C and -40°C/+40°C/+50°C	
			N <sub>Rk</sub> [kN]	V <sub>Rk,b</sub> [kN]
M8	80	12x80	0,75	3,00
M10	85	15x85	2,00	3,00
M12	85	20x85	2,00	3,00

1) For design according TR 054: N<sub>Rk</sub> = N<sub>Rk,p</sub> = N<sub>Rk,b</sub>; N<sub>Rk,s</sub> according to Table C2 Annex C2; Calculation N<sub>Rk,pb</sub> see TR 054

2) For V<sub>Rk,s</sub> see Annex C2, Table C2; Calculation of V<sub>Rk,pb</sub> and V<sub>Rk,c</sub> see TR 054

**Table C26: Displacement**

Diameter	Setting depth [mm]	Displacement under service load Tensile and shear load					
		F [kN]	δ <sub>N0</sub> [mm]	δ <sub>N∞</sub> [mm]	F [kN]	δ <sub>v0</sub> [mm]	δ <sub>v∞</sub> [mm]
M8	80	0,29	0,06	0,16	0,93	0,31	0,46
M10	85	0,73	0,08	0,16	1,08	0,23	0,34
M12	85	0,80	0,07	0,16	0,86	0,18	0,27

**Table C27: Group factor**

Configuration	Tensile		Shear parallel to free edge		Shear perpendicular to free edge	
	α <sub>g,II, N</sub>	α <sub>g,L, N</sub>	α <sub>g,II, V II</sub>	α <sub>g,L, V II</sub>	α <sub>g,II, V⊥</sub>	α <sub>g,L, V⊥</sub>
S ≥ S <sub>cr</sub> and C ≥ C <sub>cr</sub>	2,0	2,0	2,0	2,0	2,0	2,0


**JCP J-FIX POLYESTER STYRENE FREE**

**Intended use**  
Performance on hollow brick n°4: Resistances and displacements

**Annex C9**  
of European  
Technical Assessment  
ETA-25/XXXX

**Brick type: Hollow/Perforated Brick – Brique creuse RC 40**

**Table C28: Description**

Brick Type	Brique creuse RC 40	
Compressive strength [N/mm <sup>2</sup> ]	≥ 4,0	
Brick Dimensions [mm]	≥ 555 x 195 x 275	
Drilling method	Rotary drilling	

**Table C29: Installation parameter (Edge and spacing distances)**

Diameter	Setting depth [mm]	Plastic sleeve dxL [mm]	Edge distance [mm]		Spacing [mm]	
			C <sub>min</sub>	C <sub>cr</sub>	S <sub>min,II</sub> = S <sub>cr,II</sub>	S <sub>min,⊥</sub> = S <sub>cr,⊥</sub>
M8	80	12x80	278	278	555	275
M10	85	15x85	278	278	555	275
M12	85	20x85	278	278	555	275

**Table C30: Characteristic values of resistance under tension and shear loads**

Diameter	Setting depth [mm]	Plastic sleeve dxL [mm]	Category d/d, w/d and w/w Temperature range -40°C/+24°C/+40°C and -40°C/+40°C/+50°C	
			N <sub>Rk</sub> [kN]	V <sub>Rk,b</sub> [kN]
M8	80	12x80	1,00	1,50
M10	85	15x85	1,00	1,50
M12	85	20x85	0,75	1,50

1) For design according TR 054: N<sub>Rk</sub> = N<sub>Rk,p</sub> = N<sub>Rk,b</sub>; N<sub>Rk,s</sub> according to Table C2 Annex C2; Calculation N<sub>Rk,pb</sub> see TR 054  
 2) For V<sub>Rk,s</sub> see Annex C2, Table C2; Calculation of V<sub>Rk,pb</sub> and V<sub>Rk,c</sub> see TR 054

**Table C31: Displacements**

Diameter	Setting depth [mm]	Displacement under service load Tensile and shear load					
		F [kN]	δ <sub>N0</sub> [mm]	δ <sub>N∞</sub> [mm]	F [kN]	δ <sub>V0</sub> [mm]	δ <sub>V∞</sub> [mm]
M8	80	0,39	0,06	0,16	0,44	0,10	0,15
M10	85	0,44	0,06	0,16	0,63	0,18	0,27
M12	85	0,26	0,06	0,16	0,44	0,27	0,40

**Table C32: Group factor**


Configuration	Tensile		Shear parallel to free edge		Shear perpendicular to free edge	
	α <sub>g II, N</sub>	α <sub>g L, N</sub>	α <sub>g II, V II</sub>	α <sub>g L, V II</sub>	α <sub>g II, V⊥</sub>	α <sub>g L, V⊥</sub>
S ≥ S <sub>cr</sub> and C ≥ C <sub>cr</sub>	2,0	2,0	2,0	2,0	2,0	2,0

**JCP J-FIX POLYESTER STYRENE FREE**

**Intended use**  
 Performance on hollow brick n°5: Resistances and displacements

**Annex C10**  
 of European  
 Technical Assessment  
 ETA-25/XXXX

**Brick type: Hollow/Perforated Brick – Porotherm 25 P+W****Table C33: Description**

Brick Type	Porotherm 25 P+W	
Compressive strength [N/mm <sup>2</sup> ]	≥ 15,0	
Brick Dimensions [mm]	≥ 373 x 238 x 250	
Drilling method	Rotary drilling	

**Table C34: Installation parameter (Edge and spacing distances)**

Diameter	Setting depth [mm]	Plastic sleeve dxL [mm]	Edge distance [mm]		Spacing [mm]	
			C <sub>min</sub>	C <sub>cr</sub>	S <sub>min,II</sub> = S <sub>cr,II</sub>	S <sub>min,⊥</sub> = S <sub>cr,⊥</sub>
M8	80	12x80	187	187	373	250
M10	85	15x85	187	187	373	250
M12	85	20x85	187	187	373	250

**Table C35: Characteristic values of resistance under tension and shear loads**

Diameter	Setting depth [mm]	Plastic sleeve dxL [mm]	Category d/d, w/d and w/w Temperature range -40°C/+24°C/+40°C and -40°C/+40°C/+50°C	
			N <sub>Rk</sub> [kN]	V <sub>Rk,b</sub> [kN]
M8	80	12x80	2,50	2,50
M10	85	15x85	2,50	3,50
M12	85	20x85	3,00	3,50

1) For design according TR 054: N<sub>Rk</sub> = N<sub>Rk,p</sub> = N<sub>Rk,b</sub>; N<sub>Rk,s</sub> according to Table C2 Annex C2; Calculation N<sub>Rk,pb</sub> see TR 054

2) For V<sub>Rk,s</sub> see Annex C2, Table C2; Calculation of V<sub>Rk,pb</sub> and V<sub>Rk,c</sub> see TR 054

**Table C36: Displacements**

Diameter	Setting depth [mm]	Displacement under service load Tensile and shear load					
		F [kN]	δ <sub>N0</sub> [mm]	δ <sub>N∞</sub> [mm]	F [kN]	δ <sub>V0</sub> [mm]	δ <sub>V∞</sub> [mm]
M8	80	0,92	0,06	0,16	0,78	0,23	0,34
M10	85	0,91	0,06	0,16	1,06	0,19	0,28
M12	85	1,02	0,06	0,16	1,00	0,31	0,46

**Table C37: Group factor**

Configuration	Tensile		Shear parallel to free edge		Shear perpendicular to free edge	
	α <sub>g II, N</sub>	α <sub>g⊥, N</sub>	α <sub>g II, V II</sub>	α <sub>g⊥, V II</sub>	α <sub>g II, V⊥</sub>	α <sub>g⊥, V⊥</sub>
S ≥ S <sub>cr</sub> and C ≥ C <sub>cr</sub>	2,0	2,0	2,0	2,0	2,0	2,0


**JCP J-FIX POLYESTER STYRENE FREE**

**Intended use**  
Performance on hollow brick n°6: Resistances and displacements

**Annex C11**  
of European  
Technical Assessment  
ETA-25/XXXX

**Brick type: Hollow/Perforated Brick – Hlz B – 1.0 1NF 12-1**

**Table C38: Description**

Brick Type	Hlz B – 1.0 1NF 12-1	
Compressive strength [N/mm <sup>2</sup> ]	≥ 15,0	
Brick Dimensions [mm]	≥ 115 x 240 x 71	
Drilling method	Rotary drilling	

**Table C39: Installation parameter (Edge and spacing distances)**

Diameter	Setting depth [mm]	Plastic sleeve dxL [mm]	Edge distance [mm]		Spacing [mm]	
			C <sub>min</sub>	C <sub>cr</sub>	S <sub>min,II</sub> = S <sub>cr,II</sub>	S <sub>min,⊥</sub> = S <sub>cr,⊥</sub>
M8	80	12x80	120	120	240	120
M16	85	15x85	120	120	240	120
M12	85	20x85	120	120	240	120

**Table C40: Characteristic values of resistance under tension and shear loads**

Diameter	Setting depth [mm]	Plastic sleeve dxL [mm]	Category d/d, w/d and w/w Temperature range -40°C/+24°C/+40°C and -40°C/+40°C/+50°C	
			N <sub>Rk</sub> [kN]	V <sub>Rk,b</sub> [kN]
M8	80	12x80	3,50	4,00
M10	85	15x85	4,50	5,50
M12	85	20x85	5,00	5,50

1) For design according TR 054: N<sub>Rk</sub> = N<sub>Rk,p</sub> = N<sub>Rk,b</sub>; N<sub>Rk,s</sub> according to Table C2 Annex C2; Calculation N<sub>Rk,pb</sub> see TR 054

2) For V<sub>Rk,s</sub> see Annex C2, Table C2; Calculation of V<sub>Rk,pb</sub> and V<sub>Rk,c</sub> see TR 054

**Table C41: Displacements**

Diameter	Setting depth [mm]	Displacement under service load Tensile and shear load					
		F [kN]	δ <sub>N0</sub> [mm]	δ <sub>N∞</sub> [mm]	F [kN]	δ <sub>V0</sub> [mm]	δ <sub>V∞</sub> [mm]
M8	80	1,19	0,12	0,24	1,25	0,17	0,25
M10	85	1,69	0,07	0,16	2,23	0,69	1,03
M12	85	1,78	0,06	0,16	1,65	0,13	0,19

**Table C42: Group factor**

Configuration	Tensile		Shear parallel to free edge		Shear perpendicular to free edge	
	α <sub>g,II, N</sub>	α <sub>g,I, N</sub>	α <sub>g,II, V II</sub>	α <sub>g,I, V II</sub>	α <sub>g,II, V⊥</sub>	α <sub>g,I, V⊥</sub>
S ≥ S <sub>cr</sub> and C ≥ C <sub>cr</sub>	2,0	2,0	2,0	2,0	2,0	2,0


**JCP J-FIX POLYESTER STYRENE FREE**

**Intended use**  
Performance on hollow brick n°7: Resistances and displacements

**Annex C12**  
of European  
Technical Assessment  
ETA-25/XXXX

**Brick type: Hollow/Perforated Brick – Poroton P800**

**Table C43: Description**

Brick Type	Poroton P800	
Compressive strength [N/mm <sup>2</sup> ]	≥ 15,0	
Brick Dimensions [mm]	≥ 300 x 245 x 230	
Drilling method	Rotary drilling	

**Table C44: Installation parameter (Edge and spacing distances)**

Diameter	Setting depth [mm]	Plastic sleeve dxL [mm]	Edge distance [mm]		Spacing [mm]	
			C <sub>min</sub>	C <sub>cr</sub>	S <sub>min,II</sub> = S <sub>cr,II</sub>	S <sub>min,⊥</sub> = S <sub>cr,⊥</sub>
M10	135	15x135	100	100	300	230

**Table C45: Characteristic values of resistance under tension and shear loads**

Diameter	Setting depth [mm]	Plastic sleeve dxL [mm]	Category d/d, w/d and w/w Temperature range -40°C/+24°C/+40°C and -40°C/+40°C/+50°C	
			N <sub>Rk</sub> [kN]	V <sub>Rk,b</sub> [kN]
M10	135	15x135	3,50	5,50

- 1) For design according TR 054: N<sub>Rk</sub> = N<sub>Rk,p</sub> = N<sub>Rk,b</sub>; N<sub>Rk,s</sub> according to Table C2 Annex C2; Calculation N<sub>Rk,pb</sub> see TR 054  
 2) For V<sub>Rk,s</sub> see Annex C2, Table C2; Calculation of V<sub>Rk,pb</sub> and V<sub>Rk,c</sub> see TR 054

**Table C46: Displacements**

Diameter	Setting depth [mm]	Displacement under service load Tensile and shear load					
		F [kN]	δ <sub>N0</sub> [mm]	δ <sub>N∞</sub> [mm]	F [kN]	δ <sub>V0</sub> [mm]	δ <sub>V∞</sub> [mm]
M10	135	1,22	0,11	0,22	1,61	0,24	0,36

**Table C47: Group factor**

Configuration	Tensile		Shear parallel to free edge		Shear perpendicular to free edge	
	α <sub>g,II,N</sub>	α <sub>g,L,N</sub>	α <sub>g,II,V,II</sub>	α <sub>g,L,V,II</sub>	α <sub>g,II,V,⊥</sub>	α <sub>g,L,V,⊥</sub>
S ≥ S <sub>cr</sub> and C ≥ C <sub>cr</sub>	2,0	2,0	2,0	2,0	2,0	2,0


**JCP J-FIX POLYESTER STYRENE FREE**

**Intended use**  
Performance on hollow brick n°8: Resistances and displacements

**Annex C13**  
of European  
Technical Assessment  
ETA-25/XXXX

**Brick type: AAC Solid – AAC2**

**Table C48: Description**

Brick Type	Climagold	
Compressive strength [N/mm <sup>2</sup> ]	≥ 1,8	
Brick Dimensions [mm]	≥ 625 x 200 x 360	
Drilling method	Rotary drilling	

**Table C49: Installation parameter (Edge and spacing distances)**

Diameter	Setting depth [mm]	Edge distance [mm]		Spacing [mm]	
		C <sub>min</sub>	C <sub>cr,N</sub>	S <sub>min</sub>	S <sub>cr,I</sub> = S <sub>cr,II</sub>
M8	80	50	120	50	240
M10	85	50	128	50	255
M12	95	50	143	50	285
M16	105	60	158	60	315

**Table C50: Characteristic values of resistance under tension and shear loads**

Diameter	Setting depth [mm]	Category d/d, w/d and w/w Temperature range -40°C/+24°C/+40°C and -40°C/+40°C/+50°C			
		N <sub>Rk</sub> [kN]		V <sub>Rk,b</sub> [kN]	
		c=C <sub>min</sub> – S=S <sub>min</sub>	c=C <sub>cr</sub> – S=S <sub>cr</sub>	c=C <sub>min</sub> – S=S <sub>min</sub>	c=C <sub>cr</sub> – S=S <sub>cr</sub>
M8	80	1,00	1,50	1,00	1,50
M10	85	1,50	2,00	1,50	1,50
M12	95	2,00	2,50	2,50	2,50
M16	105	2,00	2,50	2,50	2,50

- 1) For design according TR 054: N<sub>Rk</sub> = N<sub>Rk,p</sub> = N<sub>Rk,b</sub>; N<sub>Rk,s</sub> according to Table C2 Annex C2; Calculation N<sub>Rk,pb</sub> see TR 054  
 2) For V<sub>Rk,s</sub> see Annex C2, Table C2; Calculation of V<sub>Rk,pb</sub> and V<sub>Rk,c</sub> see TR 054

**Table C51: Displacements**

Diameter	Setting depth [mm]	Displacement under service load Tensile and shear load					
		F [kN]	δ <sub>N0</sub> [mm]	δ <sub>N∞</sub> [mm]	F [kN]	δ <sub>V0</sub> [mm]	δ <sub>V∞</sub> [mm]
		M8	80	0,63	0,10	0,20	0,65
M10	85	0,83	0,12	0,24	0,69	0,34	0,51
M12	95	1,01	0,15	0,30	0,90	0,38	0,57
M16	105	0,99	0,16	0,32	0,98	0,40	0,60

**Table C52: Group factor**


Configuration	Tensile		Shear parallel to free edge		Shear perpendicular to free edge	
	α <sub>g II, N</sub>	α <sub>g⊥, N</sub>	α <sub>g II, V II</sub>	α <sub>g⊥, V II</sub>	α <sub>g II, V⊥</sub>	α <sub>g⊥, V⊥</sub>
S ≥ S <sub>min</sub> and C ≥ C <sub>min</sub>	2,0	2,0	2,0	2,0	2,0	2,0

**JCP J-FIX POLYESTER STYRENE FREE**

**Intended use**  
 Performance on AAC2 brick n°9: Resistances and displacements

**Annex C14**  
 of European  
 Technical Assessment  
 ETA-25/XXXX

**Brick type: AAC Solid Brick – AAC5****Table C53: Description**

Brick Type	Blocco sismico	
Compressive strength [N/mm <sup>2</sup> ]	≥ 5,0	
Brick Dimensions [mm]	≥ 625 x 200 x 300	
Drilling method	Rotary drilling	

**Table C54: Installation parameter (Edge and spacing distances)**

Diameter	Setting depth [mm]	Edge distance [mm]		Spacing [mm]	
		C <sub>min</sub>	C <sub>cr,N</sub>	S <sub>min</sub>	S <sub>cr,I</sub> = S <sub>cr,II</sub>
M8	80	50	120	50	240
M10	85	50	128	50	255
M12	95	50	143	50	285
M16	105	60	158	60	315

**Table C55: Characteristic values of resistance under tension and shear loads**

Diameter	Setting depth [mm]	Category d/d, w/d and w/w Temperature range -40°C/+24°C/+40°C and -40°C/+40°C/+50°C			
		N <sub>Rk</sub> [kN]		V <sub>Rk,b</sub> [kN]	
		c=C <sub>min</sub> – S=S <sub>min</sub>	c=C <sub>cr</sub> – S=S <sub>cr</sub>	c=C <sub>min</sub> – S=S <sub>min</sub>	c=C <sub>cr</sub> – S=S <sub>cr</sub>
M8	80	1,00	2,50	1,00	3,50
M10	85	1,50	3,00	1,50	4,00
M12	95	2,00	3,50	2,50	4,00
M16	105	2,00	4,00	2,50	4,00

1) For design according TR 054: N<sub>Rk</sub> = N<sub>Rk,p</sub> = N<sub>Rk,b</sub>; N<sub>Rk,s</sub> according to Table C2 Annex C2; Calculation N<sub>Rk,pb</sub> see TR 054

2) For V<sub>Rk,s</sub> see Annex C2, Table C2; Calculation of V<sub>Rk,pb</sub> and V<sub>Rk,c</sub> see TR 054

**Table C56: Displacements**

Diameter	Setting depth [mm]	Displacement under service load Tensile and shear load					
		F [kN]	δ <sub>N0</sub> [mm]	δ <sub>N∞</sub> [mm]	F [kN]	δ <sub>V0</sub> [mm]	δ <sub>V∞</sub> [mm]
		M8	80	1,10	0,08	0,16	1,29
M10	85	1,22	0,10	0,20	1,53	0,32	0,48
M12	95	1,52	0,11	0,22	1,55	0,43	0,65
M16	105	1,74	0,11	0,22	1,58	0,45	0,68

**Table C57: Group factor**

Configuration	Tensile		Shear parallel to free edge		Shear perpendicular to free edge	
	α <sub>g II, N</sub>	α <sub>g L, N</sub>	α <sub>g II, V II</sub>	α <sub>g L, V II</sub>	α <sub>g II, V L</sub>	α <sub>g L, V L</sub>
S ≥ S <sub>min</sub> and C ≥ C <sub>min</sub>	2,0	2,0	2,0	2,0	2,0	2,0

**JCP J-FIX POLYESTER STYRENE FREE**

**Intended use**  
Performance on AAC5 brick n°10: Resistances and displacements

**Annex C15**  
of European  
Technical Assessment  
ETA-25/XXXX