



JF750B1H  
Vol. 750ml

JF750B1G  
Vol. 750ml

## INFORMATION

B1 rated expanding foam is a one-part, self-expanding, ready-to-use polyurethane construction foam designed for sealing joints in walls and service openings to prevent the passage of smoke and fire. The one-component polyurethane foam cures under the influence of humidity contained in the air and is characterised by a homogeneous, fine-cellular structure. The foam is produced in a plant with the Quality Management System ISO 9001:2015 implemented.

## INTENDED USE

- Sealing For Window Fitting
- Sealing For Door Fitting
- Filling Of Free Spaces, Cracks, Gaps, Pipe Penetrations\*
- Sealing Roof, Wall And Floor Joints
- Thermal Insulation
- Acoustic Insulation

## FEATURES

- Low B1/B s1 d0 Foam Flammability\*\*
- High Fire Resistance For Linear Joints (Up To EI240)
- Standard Foam Yield
- Normal Foam Pressure
- Normal Foam Volume Increase (Post-expansion)
- No Application Of Foam Multi-Positioning
- Standard Foam Adhesion To Surface

## APPROVALS

European Technical Assessment



ETA21/0413

Fire Resistance



ETA21/0413

\* The fire resistance tests carried out do not apply

\*\* According to BS EN 13501-1 (Fire classification of construction products and building elements)

## RELATED PRODUCTS



JFIRESEL  
Vol. 750ml

B1 Fire Sealant



JF500C  
Vol. 500ml

Polyurethane Cleaner  
(For Un-cured Foam)



JFGUNC

Professional Applicator Gun  
(For JF750B1G)



JFGUNB

Conventional Applicator Gun  
(For JF750B1G)

## TECHNICAL DATA

GENERAL CHARACTERISTICS (+23°C/50% RH)

PARAMETER	Dimension	Value
Full cure time (RB024)	h	24
Cutting time (EN 17333-3:2020) - The result given for a foam strip of 3cm diameter	min	≤40
Flammability class (EN 13501-1+A1:2010) - Test method EN ISO 11925-2, EN 13823	-	Bs1d0***
Dimensional stability (EN 17333-2:2020)	%	≤3
Heat conductivity coefficient (λ) (RB24)	W/mK	0.036
Secondary increase in volume (post-expansion) (EN 17333-2:2020)	%	90 - 120
Capacity (free foaming) (RB024)	l	35 - 42
Capacity in gap (The value given for a gap with dimensions 35×1000×35 (width×length×depth [mm])) (RB024)	l	24 - 32

\*\*\* B (combustible materials – very limited contribution to fire), s1 (emissions absent or very little), d0 (No burning droplets)





## TECHNICAL DATA

GENERAL CHARACTERISTICS (+23°C/50% RH)		
PARAMETER	Dimension	Value
Skin formation time (EN 17333-3:2020)	min	≤10
Fire resistance (EN 13501-2+A1:2008) test method (EN 1366-4:2008) (for gaps with width 10 mm and depth 200 and 240mm, Or with width 20mm and depth 240mm in construction made of aerated concrete blocks)	-	EI240
Flammability class (DIN 4102) (for linear gaps with maximum width 30mm and maximum depth 80 mm between monolithic, mineral or metal construction materials)	-	B1
Colour	-	Pink
Can / applicator temperature (optimal +20°C)	°C	+20 ÷ +30
Ambient / surface temperature	°C	+20 ÷ +30

## PERFORMANCE DATA

FIRE RESISTANCE DATA		
Joint orientation	Fire resistance class	
	Joint width ≤ 10mm	11mm ≤ Joint width ≤ 30mm
<b>Figure B1</b>		
Vertical linear joint seal made with use of B' Fire Stop Gun Foam in rigid wall	EI 180 - V - X - F - W 10	EI 60 - V - X - F - W 11 to W 30
Horizontal linear joint seal made with use of B' Fire Stop Gun Foam in rigid wall	EI 120 - T - X - F - W 10	EI 30 - T - X - F - W 11 to W 30
Vertical linear joint seal made with use of B' Fire Stop Foam in rigid wall	EI 120 - V - X - F - W 10	EI 60 - V - X - F - W 11 to W 30
Horizontal linear joint seal made with use of B' Fire Stop Foam in rigid wall	EI 120 - T - X - F - W 10	EI 60 - T - X - F - W 11 to W 30
<b>Figure B2</b>		
Vertical linear joint seal made with use of B' Fire Stop Sealant and B' Fire Stop Gun Foam in rigid wall	EI 240 - V - X - F - W 10	EI 120 - V - X - F - W 11 to W 30
Horizontal linear joint seal made with use of B' Fire Stop Sealant and B' Fire Stop Gun Foam in rigid wall	-	EI 240 - T - X - F - W 10 to W 30
Vertical linear joint seal made with use of B' Fire Stop Sealant and B' Fire Stop Foam in rigid wall	EI 240 - V - X - F - W 10	EI 120 - V - X - F - W 11 to W 30
Horizontal linear joint seal made with use of B' Fire Stop Sealant and B' Fire Stop Foam in rigid wall	-	EI 240 - T - X - F - W 10 to W 30
<b>Figure B3</b>		
Vertical linear joint seal made with use of B' Fire Stop Sealant and mineral wool in rigid wall	-	EI 240 - V - X - F - W 10 to W 30
Horizontal linear joint seal made with use of B' Fire Stop Sealant and mineral wool in rigid wall	-	EI 240 - T - X - F - W 10 to W 30

B' Fire Stop Gun Foam or B' Fire Stop Foam



Figure B1

B' Fire Stop Gun Foam or B' Fire Stop Foam

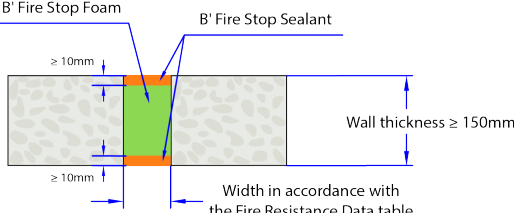


Figure B2

Mineral wool, density ≥ 40 kg/m³

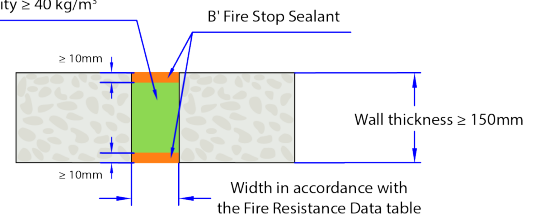


Figure B3





## METHOD OF USE

Prior to application, read safety instruction presented at the end of TDS and in MSDS.

### • Surface preparation:

- The foam adheres to typical construction materials, such as: brick, concrete, plaster work, wood, metals, styrofoam, hard PVC and rigid PUR.
- The working surface should be cleaned and degreased.
- The surface should be sprinkled with water at application temperature above 0°C.
- Secure surfaces exposed to accidental foam contamination.

### • Product preparation:

- A can that is too cold should be brought to room temperature, e.g. by immersion in warm water with temperature up to 30°C or leaving it in room temperature for at least 24 h.
- Applicator temperature cannot be lower than can temperature.

### • Application:

- Put on protective gloves.
- Vigorously shake the can (10-20 seconds, the valve facing down) to thoroughly mix the components.
- Screw the can onto the applicator.
- Working position of the can is "valve facing down".
- Vertical gaps should be filled with foam starting at the bottom and moving up.
- Do not fill the entire gap – the foam will increase in volume.
- When sealing doors and windows, keep a minimum distance of 10 mm and a maximum of 30 mm between the structure and the door or window frame. Gaps > 30 mm are not recommended. Fill in gaps wider than 30 mm working bottom to top moving from one gap wall to another alternately, creating a zigzag pattern. Gaps > 50 mm are not permitted.
- Should application be interrupted for more than 5 minutes, the applicator nozzle should be cleaned with polyurethane foam cleaner. To do so, place the plastic tube supplied with the dispensing applicator packaging on the dispensing applicator outlet to avoid the formation of mist containing the cleaner and applicator residue during cleaning. Then screw the can with the cleaner onto the dispensing applicator and press the trigger until clear liquid flows out of the applicator. The can should be shaken prior to application.

### • Works after completion of application:

- Immediately after full foam hardening, it should be secured against exposure to UV rays by using e.g. plaster or paints.
- Clean the dispensing gun thoroughly after the completion of the work. To do so, place the plastic tube supplied with the dispensing gun packaging on the dispensing gun outlet to avoid the formation of mist containing the cleaner and applicator residue during cleaning. Then screw the can with the cleaner onto the dispensing gun and press the trigger until clear liquid flows out of the gun.

### • Remarks / restriction:

- **Door and windows fitting without using mechanical coupling is forbidden. Lack of mechanical couplings may cause deformation of the mounted element.**
- The curing process is dependent on temperature and humidity. The decrease in ambient temperature within 24 h after the application below the minimum application temperature can affect the quality and / or correctness of the seal.
- Hurried attempts at preliminary treatment may cause irreversible changes in foam structure and its stability and may affect deterioration of foam utility parameters.
- Open foam package should be used within 1 week.





## METHOD OF USE

- Adhesion to polyethylene, polypropylene, polyamide, silicone and Teflon is limited.
- Fresh foam should be removed with polyurethane foam cleaner.
- Hardened foam may only be removed mechanically (e.g. with a knife).
- Quality and technical condition of used applicator affect the parameters of final product.
- The foam should not be used in spaces without access of fresh air and poorly ventilated or in places exposed to direct sunlight.

All given parameters are based on laboratory tests compliant with internal manufacturer's standards and strongly depend on foam hardening conditions (ca, ambient, surface temperature, quality of used equipment and skills of person applying the foam).

The manufacturer recommends to commence finishing works after full hardening is completed, i.e. after 24 h.

Producer uses test methods approved by FEICA designed to deliver transparent and reproducible test results, ensuring customers have an accurate representation of product performance. FEICA OCF test methods are available at: <http://www.feica.com> (Our industry -> PU Foam (OCF) -> OCF Test Methods). FEICA is a multinational association representing the European adhesive and sealant industry, including one-component foam manufacturers.

## TRANSPORT / STORAGE

The foam maintains its usability within 12 months from manufacturing date, provided that it is stored in original packaging in vertical position (valve facing up) in a dry place in temperature +5°C do +30°C . Storage in temperature exceeding +30°C shortens the shelf life of the product, adversely affecting its parameters. The product may be stored in temperature -5°C, no longer however than for 7 days (excluding transport). Storage of foam cans in temperature exceeding + 50°C or in vicinity of open flame is not allowed. Storage of the product in a position other than recommended may result in jamming the valve. The can cannot be squeezed or pierced even when it is empty.

Do not store the foam in the passenger compartment. Transported only in the trunk.

Detailed transport information is included in the Material Safety Data Sheet (MSDS).

TRANSPORTATION PERIODS	
Transport Temperature °C	Foam transport period days
< -20°C	4
-19°C ÷ -10°C	7
-9°C ÷ -0°C	10

## SAFETY AND HEALTH PRECAUTIONS

The information contained herein is offered in good faith based on Producer's research and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information shall not be used in substitution for customer's tests to ensure that Producer's products are fully satisfactory for your specific applications. Producer's sole warranty is that the product will meet its current sales specifications. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. Producer specifically disclaims any other expressed or implied warranty of fitness for a particular purpose or merchantability. Producer disclaims liability for any incidental or consequential damages. Suggestions of use shall not be taken as inducements to infringe any patent.

