



J-Plug Plasterboard Fixing

Self drilling fixings, complete with screw, suitable for plasterboard



JJP15A & JJP30A

Zinc Alloy



JJP15 & JJP30

Zinc Alloy




JJP10

Nylon


Part Number	Screw Thread Diameter	Plug Length	Screw Length	Maximum Fixture Thickness	Screw & Plug Drive	Rec. Tensile Resistance	Rec. Shear Resistance	Box Quantity
	mm	mm	mm	mm	Pozi	kN	kN	
JJP15A	4.5	32	35	15	Nº2	0.06	0.18	100
JJP30A	4.5	32	50	30	Nº2	0.06	0.18	100
JJP15	4.5	37	35	15	Nº2	0.06	0.18	100
JJP30	4.5	37	50	30	Nº2	0.06	0.18	100
JJP10	4.5	29	30	10	Nº2	0.06	0.18	100

JJP15A also available in tubs of 500 (JJP15ATUB) and in a plastic case of 200 with screwdriver (JJP15ACASE)

Installation Instructions

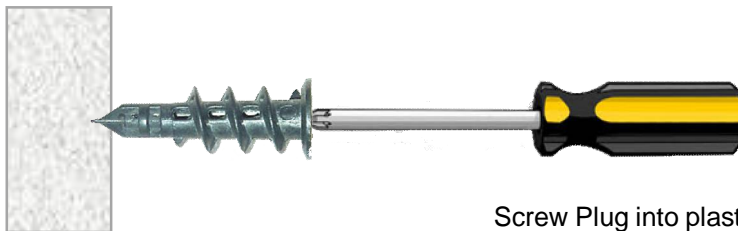

Screw Plug into plasterboard using a hand held screwdriver

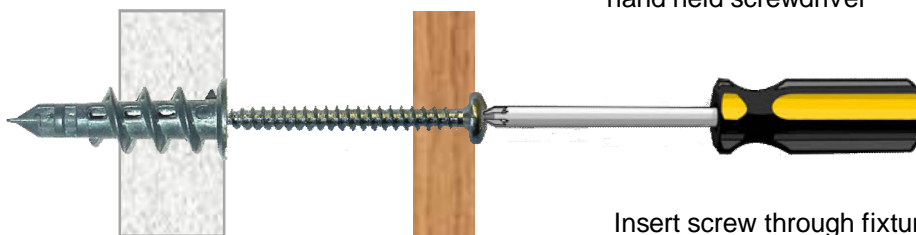

Insert screw through fixture into plug



Tighten by hand until secure

JCP Construction Products, Unit 14 Teddington Business Park, Station Rd, Teddington Middlesex TW11 9BQ

Tel. 020 8943 1800 Web www.jcpfixings.co.uk